




TECHNICAL BULLETIN

Audco Ball Valve

Reduced Bore Fire safe Flanged Ball Valves 51/52 Series

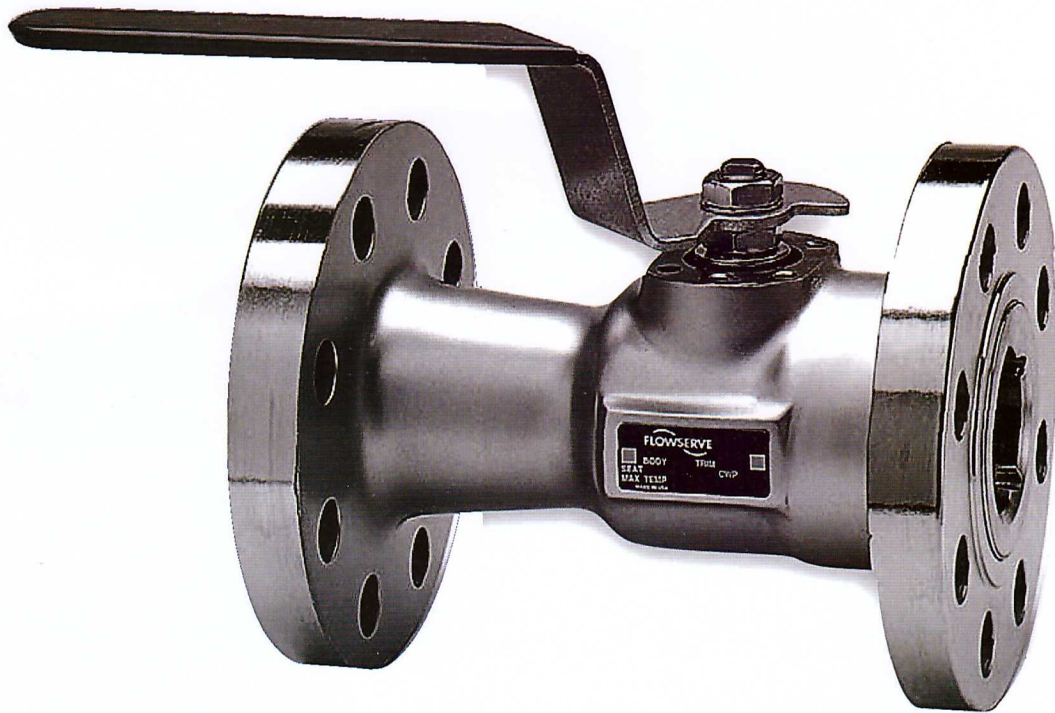

Experience In Motion

With the Series 51/52 designed to BS EN ISO 17292 / API 6D, AUDCO brings to the market a reduced bore valve which combines low cost of ownership and long service life with high operational safety and a range of features which sets the standards for others to follow.

What remains unchanged however is Audco's total dedication to quality and service support. All of this is the result of following one simple strategy - to listen and respond to the needs of our customers.

51/52 Valve Assembly

Anti-blowout stem - Inserted from inside of valve body for greater safety

Actuator mounting - Conforms to ISO 5211 for ease of actuation

Gland nut - Does not need to be removed for actuator mounting thereby maintaining valve integrity


Anti-static stem - Ensures electrical continuity between ball and body


Body seals - Flexible Graphite as standard for fire safe integrity maintained with metal to metal secondary seal

Ball - 316 stainless steel as standard with pressure equalising hole to balance cavity pressure with line pressure when valve is open. Parallel ported ball maximises flow and minimises pressure drop

Insert - Screwed insert designed to withstand full line differential pressure


Seats - Wide range of seat materials to suit customer applications.

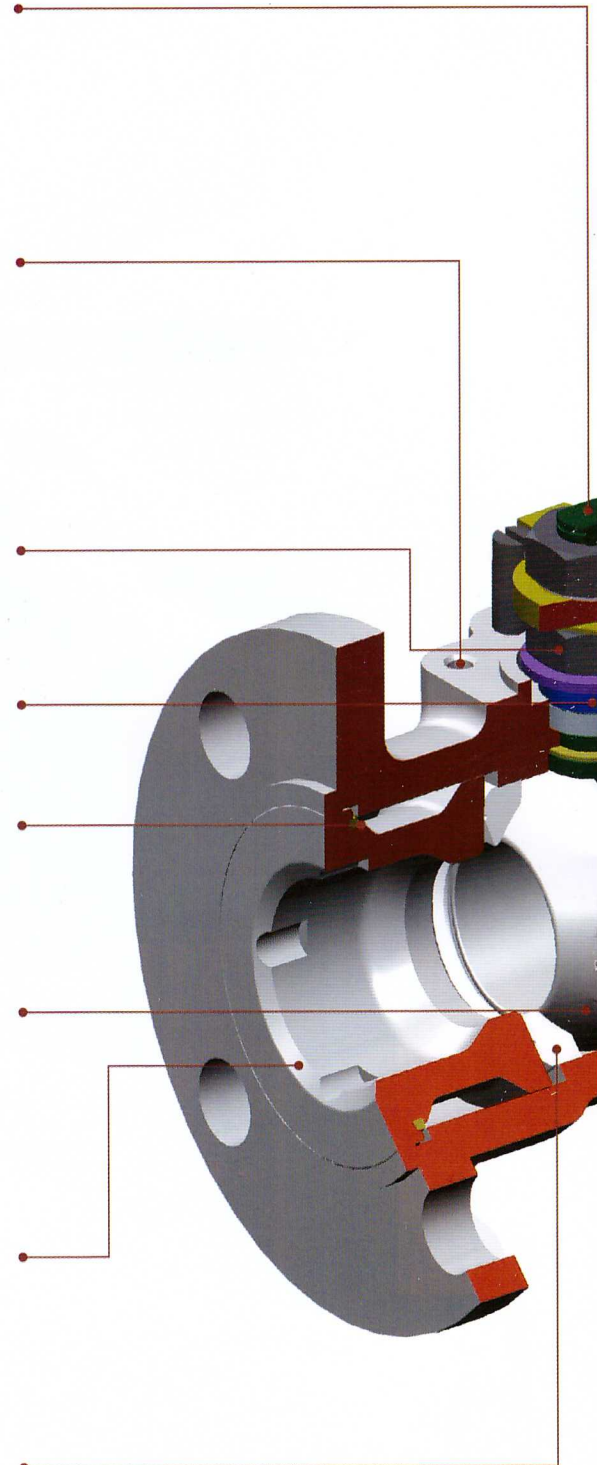

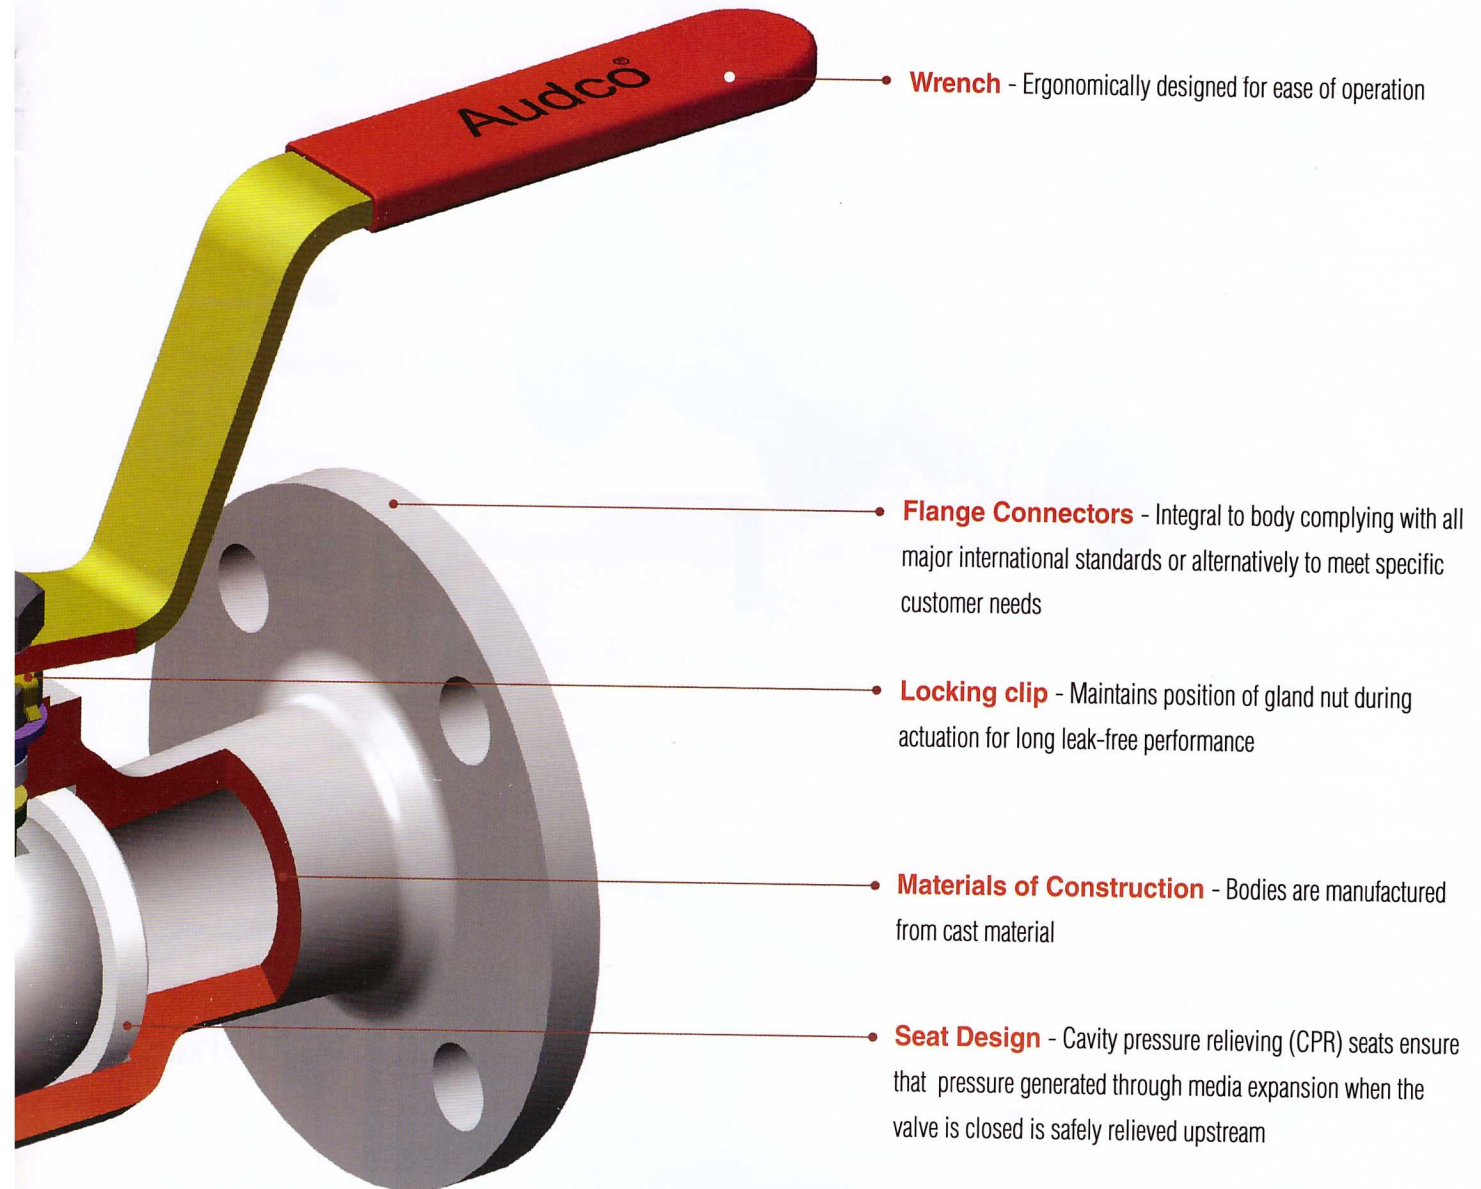


Reduced Bore Fire safe Flanged Ball valve parts

DN15 - DN50

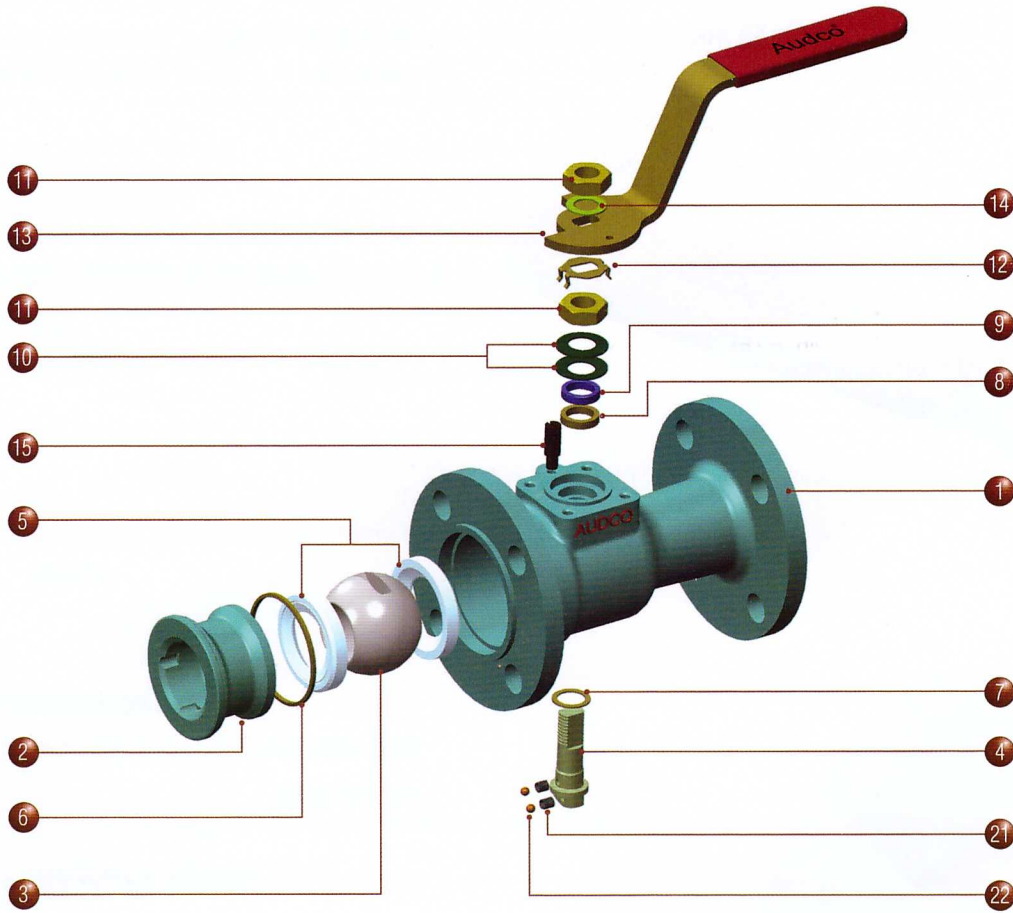

DN80 - DN200

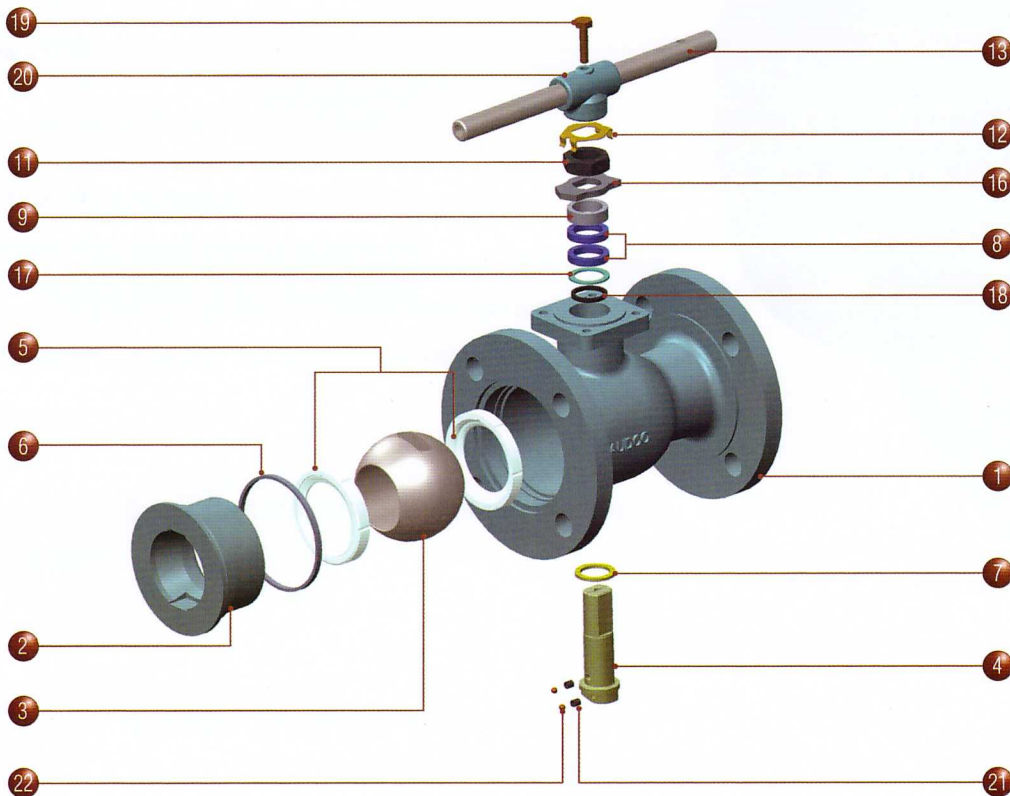


Parts and Material Specification

Item	Description	Material	Item	Description	Material
1	Body	Stainless Steel ASTM-A351 CF8M Carbon Steel ASTM A216 WCB	12*	Gland Nut Locking Clip	Carbon Steel Rustproofed
2	Insert	Stainless Steel ASTM-A351 CF8M Carbon Steel ASTM A216 WCB	13	Wrench	Stainless Steel/ Carbon Steel
3	Ball	Stainless Steel ASTM-A351 CF8M ASTM A479 316	14	Spring washer	Stainless Steel
4	Stem	Stainless Steel 316	15	Stop Pin	Stainless Steel/ Carbon Steel
5*	Seat Ring	PTFE Virgin, PTFE 25% glass filled, Fluorofill, PEEK, metal or other ptions	16	Stop Indicator	Stainless Steel 316/ Zinc Plated Carbon Steel
6*	Body Seal	Flexible Graphite/ Virgin PTFE	17	Stem Location Ring	Stainless Steel 316
7*	Stem Thrust Seal	PTFE 25% glass filled	18	Secondary Stem Seal	Virgin PTFE
8*	Gland Packing	Flexible Graphite	19	Wrench Fixing Bolt	Carbon Steel
9	Gland	Stainless Steel 316	20	Wrench Head	S.G Iron/ Zinc Plated Carbon Steel/ Carbon Steel
10*	Disc Spring	Stainless Steel	21	Anti-Static Spring	Stainless Steel
11	Gland/ Wrench Nut	Zinc Plated Carbon Steel/ Stainless Steel	22	Anti-Static Plunger	Stainless Steel

*Items marked thus denote component supplied in repair kit.

Pressure/Temperature Rating

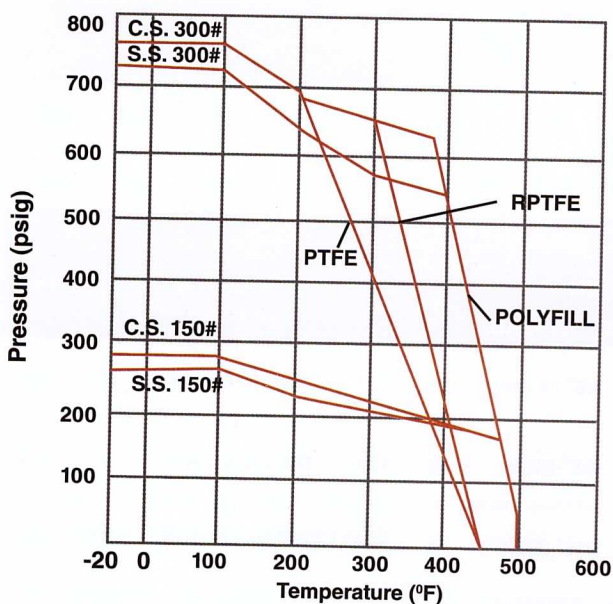

NOTE: Max. working pressure/temperature limited by both flange rating, seat and body seal capability.


Technical Information

Valve size	Series	Weight kg	Flow Coefficients C _v
DN15	51	2	8
	52	2.5	
DN20	51	3	12
	52	3.4	
DN25	51	3.6	32
	52	4.3	
DN40	51	5.9	82
	52	7.3	
DN50	51	8.2	120
	52	10	
DN80	51	17.9	350
	52	22.7	
DN100	51	28.1	670
	52	36.3	
DN150	51	48	874
	52	70	
DN200	51	120	1583
	52	170	

General Assembly

51 Series - Reduced bore class 150

52 Series - Reduced bore class 300

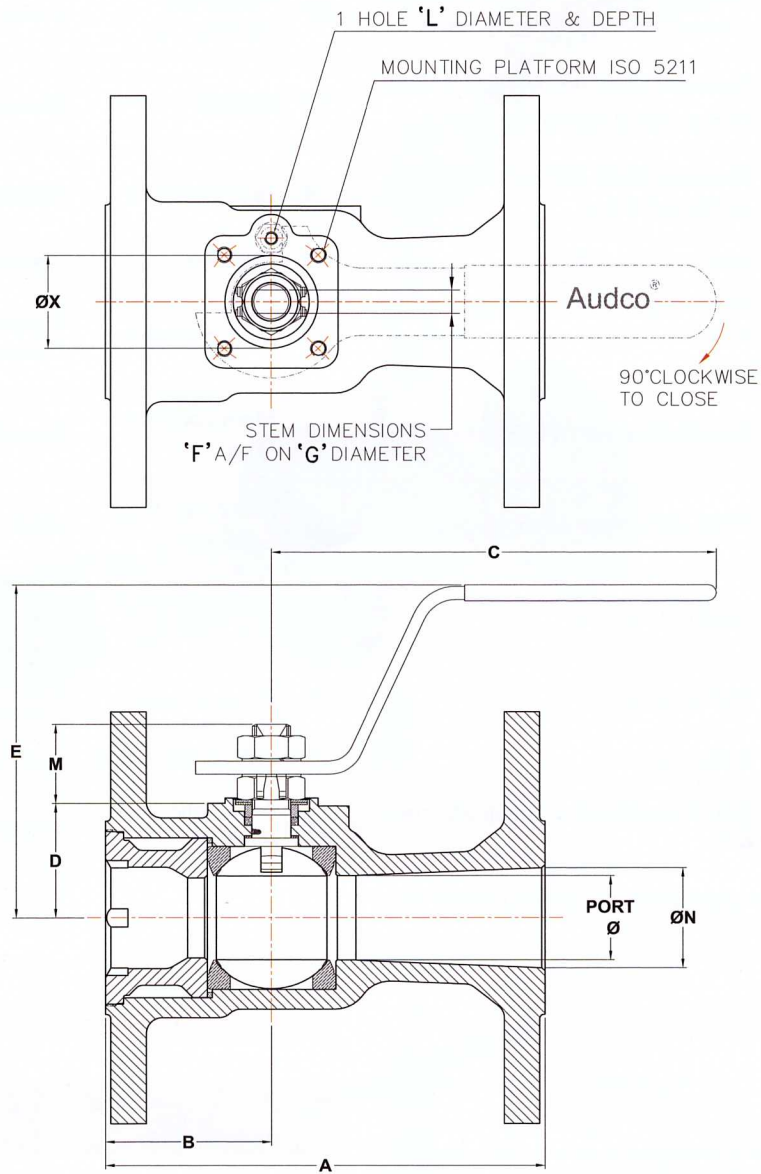


Valve Dimensions (mm)

51/52 Series (DN15 - DN50)															
Valve Size	Port	A		B		C	D	E	STEM		M	N	L THREAD & DEPTH	X	ISO MTG
		51	52	51	52				F - A/F	G - THREAD					
15	11.0	108	140	46		155	21.95 21.65	98	5.5	3/8"-24 UNF	18	13.5	M5x0.8p 6.0 MIN	25	F03
20	14.3	117	152	49.6		155	24.27 24.01	98	5.5	3/8"-24UNF	18	17.5	M5x0.8p 6.0 MIN.	30	F04
25	20.6	127	165	57.1		168	31.21 30.95	111	7.5	7/16"-20UNF	25	24.5	M8x1.25p 10.0MIN.	30	F04
40	31.8	165	190	62.3	82.7	168	43.31 43.05	126.4	8.6	9/16"-18UNF	30	37.7	M6x1.0p 6.0 MIN.	35	F05
50	38.1	178	216	67.8		193	48.76 48.50	131.5	8.6	9/16"-18UNF	30	48.1	M8x1.25p 10.0 MIN.	35	F05

General Assembly (DN80-DN200)

51 Series - Reduced bore class 150

52 Series - Reduced bore class 300

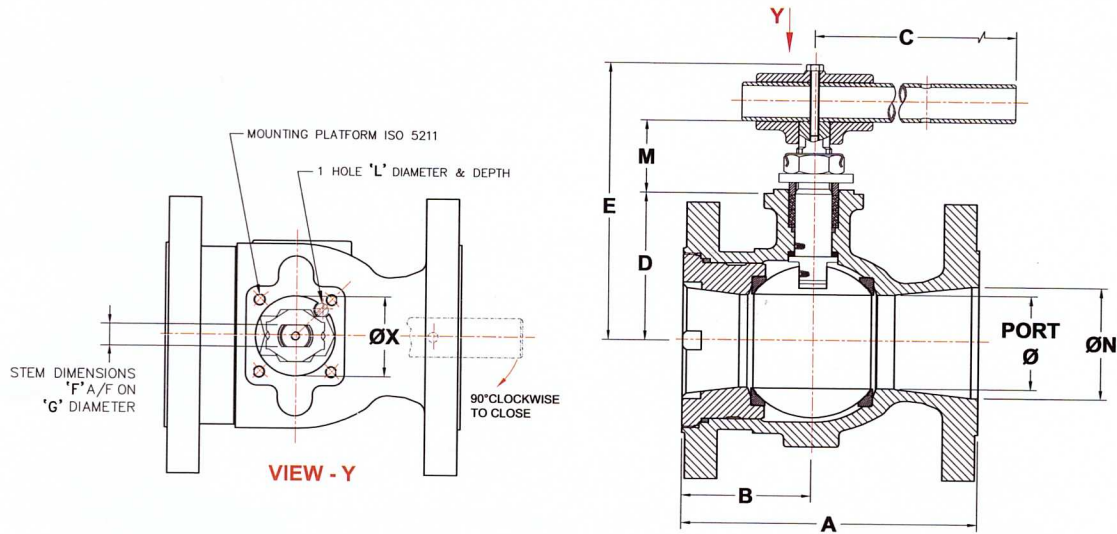

Valve Dimensions (mm)

51 – Series (DN80 – DN200)													
Valve Size	Port	A	B	C	D	E	STEM		M	N	L THREAD & DEPTH	X	ISO MTG
							F - A/F	ØG					
80	64.0	203	89	350	101.7 101.3	190	15.1	21.1	51.1 48.4	76.8	M6x1.0p 6.0 MIN	55	F07
100	76.2	229	82	350	112.4 111.6	201	15.1	21.1	51.1 48.4	102.1	M6x1.0p 6.0 MIN	55	F07
150	102.3	267	129	557	140.6 139.8	235	19.3	27.1	55.9 53.2	151.5	M8x1.25p 10.0 MIN	70	F10
200	151.0	292	144.5	850	182.4 181.6	310	26.6	33.1	73.0 70.3	203.3	M10x1.5p 12.0 MIN	85	F12

52 – Series (DN80 – DN200)													
Valve Size	Port	A	B	C	D	E	STEM		M	N	L THREAD & DEPTH	X	ISO MTG
							F - A/F	ØG					
80	64.0	282	89	350	101.7 101.3	190	15.1	21.1	51.1 48.4	76.8	M6x1.0p 6.0 MIN	55	F07
100	76.2	305	107	557	119.9 119.1	214	19.3	27.1	55.7 53.0	102.1	M8x1.25p 10.0 MIN	70	F10
150	102.3	403	129	850	147.1 146.3	275	26.6	33.1	73.0 70.3	151.5	M10x1.5p 12.0 MIN	85	F12
200	151.0	419	144.5	850	194.6 193.8	327	30.4	37.8	77.4 74.7	203.3	M10x1.5p 12.0 MIN	100	F14

Notes

- When wrench not fitted, flats on stem when parallel to pipeline axis denote open position.
- Installation, Operating and Maintenance instructions are supplied with product and also available on request

Standards of Compliance

Valve Specification	BS EN ISO 17292, API 6D
Flanges 51	ASME B16.5 Class 150
Flanges 52	ASME B16.5 Class 300
Face to Face Lengths	ASME B16. 10
Pressure Test Specification	BS EN 12266 Part 1
Fire safe Specification	API 607
Sour Gas Applications	NACE MR0175/ISO 15156