


DIPV

Double Isolation Plug Valve

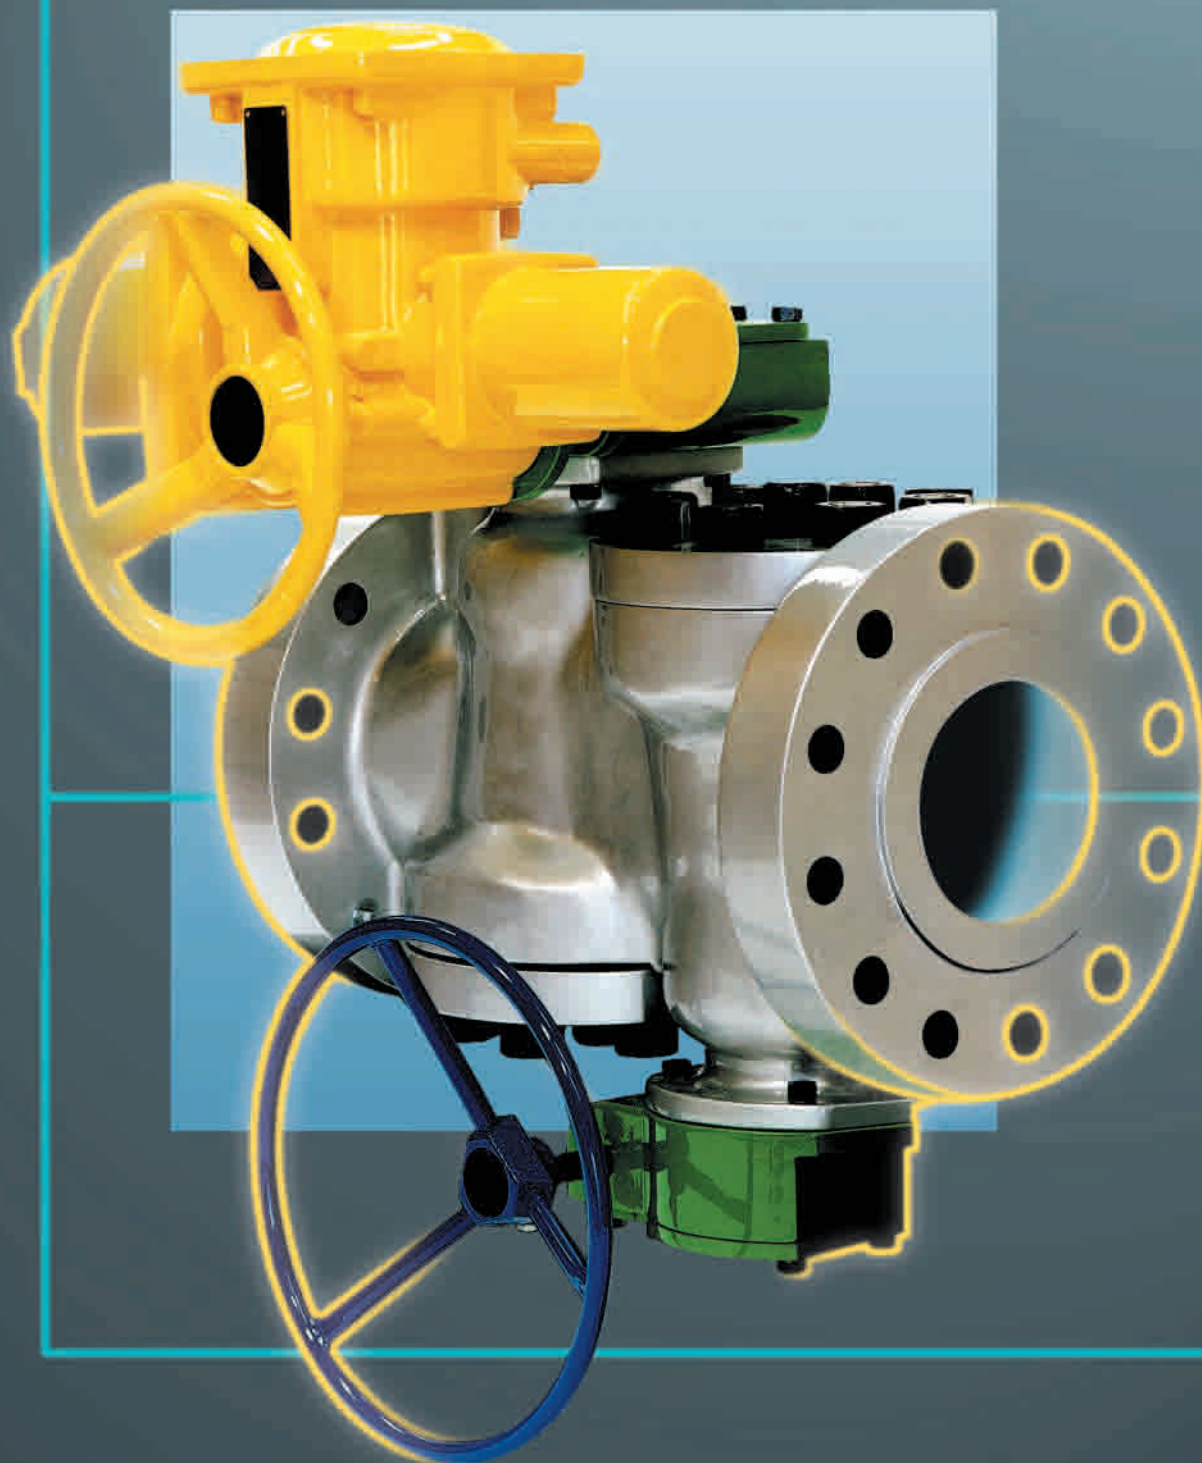

 Serck Audco Valves

Double Isolation Plug Valve



Contents



Introduction	pages 4 & 5
Typical Installations	page 6
Range	page 7
Figure Numbering / Standards	page 8
Design Features	pages 9 - 13
Pressure Testing	page 14
Valve Data	pages 15 - 20
Materials	pages 21 & 22
Sealants	pages 23 - 26



Introduction - DIPV

Double Isolation Plug Valve

Based on Serck Audco SUPER-H pressure balanced taper plug technology, **Double Isolation Plug Valve** offers true bubble tight double isolation, within a single valve body.

The oil and gas industry is no longer satisfied with the shut-off provided by conventional double block and bleed ball, gate or plug valves. True double isolation has become a prime requirement as safety standards are raised throughout the industry, especially where it is necessary for an operator to work downstream (or upstream) of the valve.

A further advantage of true double isolation (where the first plug gives complete isolation), is that the bleed point can be used to verify that no contamination has occurred when more than one type of line medium has passed down the pipeline.


The Serck Audco Super-H plug valve is widely acknowledged in the oil and gas industry for its superior shut-off at high differential pressures together with excellent reliability and durability. This same design is used in the Serck Audco Double Isolation Plug Valve.



What are the benefits?


- No pipework modification - total interchangeability with existing valves.
- Choice of bleed connection options.
- Same range as single valve - including hard facing.
- Meets the same industry and fire-test standards as a single valve.
- Low life cycle cost - less than two single valves.
- Assured sealing on both sides of the valve.
- Reduced leak paths - eliminates inter-valve pipework on double block and bleed configurations.
- Compact, lightweight alternative to gate valves and ball valves in series.

Single Plug - Single Isolation

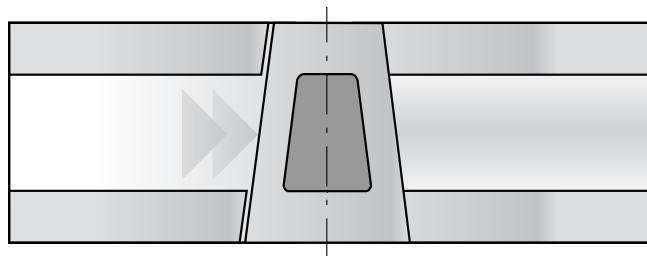

Double Plug - Double Isolation

Independently operated plugs mean maximum downstream isolation safety.


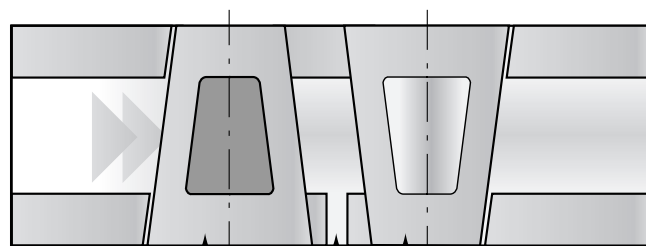


PRIMARY PLUG -
BUBBLE TIGHT SEAL
AGAINST HIGH
DIFFERENTIAL
PRESSURE

BLEED POINT
BACK-UP
PLUG


Proven plug valve integrity - setting new standards for double block & bleed

True double isolation
within a single valve body

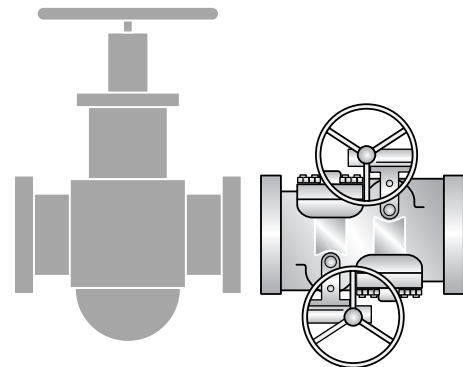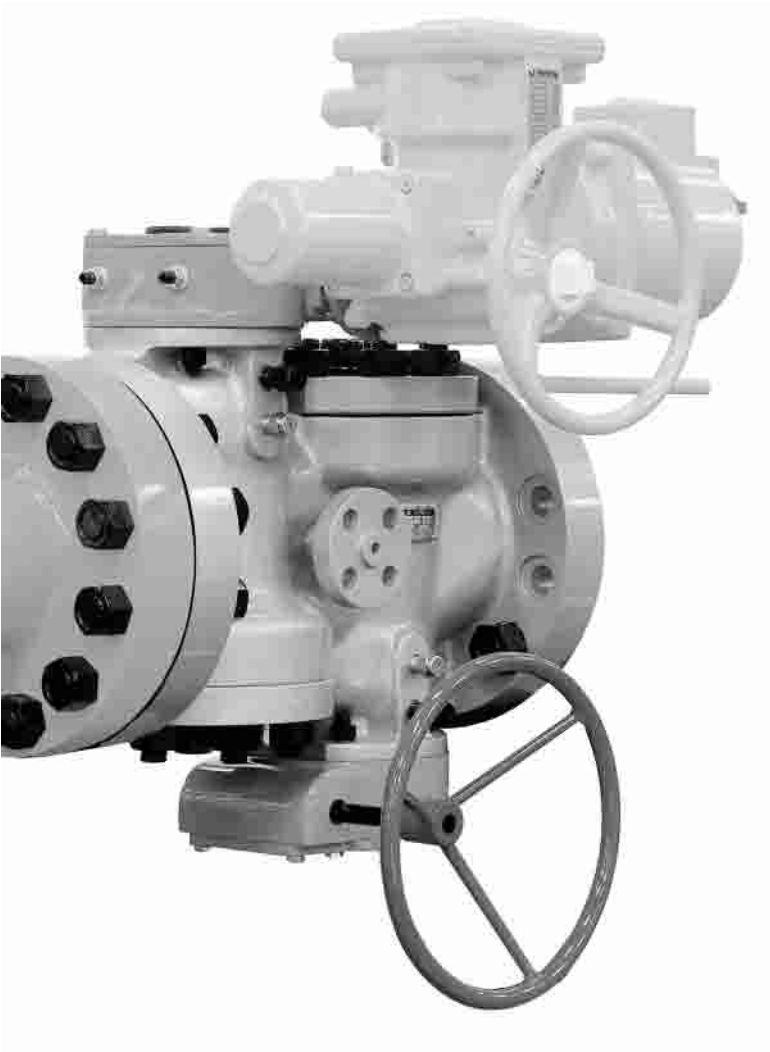

COMPARED WITH GATE VALVES

- Same face-to-face but smaller overall.
- Compact design means less weight.

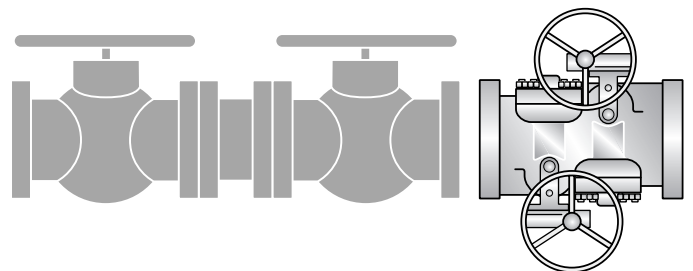

COMPARED WITH BALL VALVES

- One **DIPV** replaces two ball valves.
- Less interconnecting pipework means fewer leak paths.
- Weight saving.
- Cost saving.




Typical Installations



Gas Transportation - Gas Compression Station




CONFIGURATION USING BALL VALVES

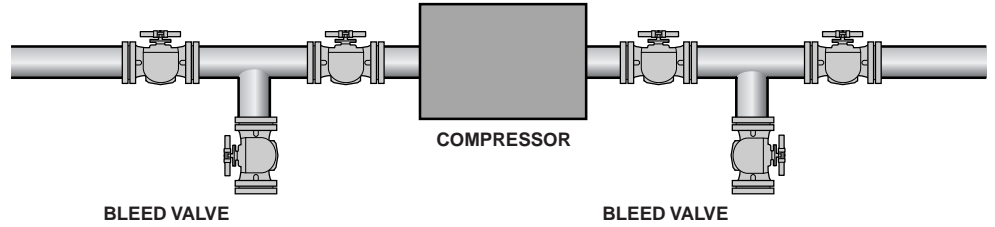

CONFIGURATION USING DOUBLE ISOLATION PLUG VALVES

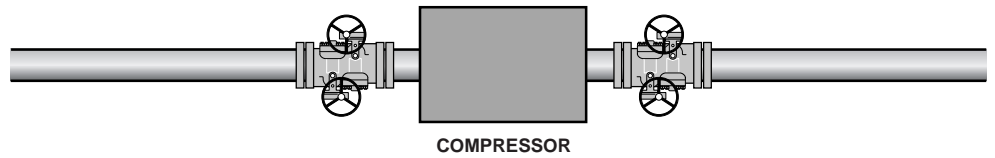


BALL VALVE



DOUBLE ISOLATING PLUG VALVE

Oil & Gas Production - Well Heads Manifold

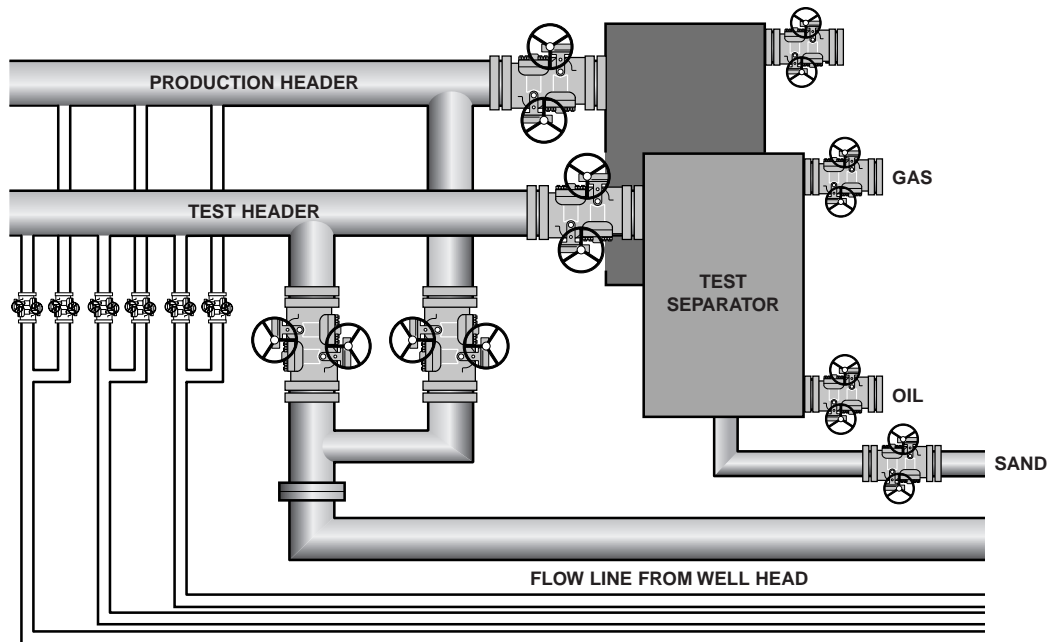

Range

inches	mm	Class					
		150	300	600	900	1500	2500
2	50	●	●	●	●	●	●
3	80	●	●	●	●	●	●
4	100	●	●	●	●	●	●
6	150	●	●	●	●	●	●
8	200	●	●	●	●	●	●
10	250	●	●	●	●	●	●
12	300	●	●	●	●	●	●
14	350	●	●	●	●	●	
16	400	●	●	●	●	●	
18	450	●	●	●	●		
20	500	●	●	●	●		
24	600	●	●	●	●		

Main Features

Principles of Operation

Serck Audco Double Isolation Plug Valves feature twin Pressure Balanced Taper Plugs and a centrally located bleed port, integral with the body. They are designed to give bubble tight shut off on both high and low pressure applications. This is a robust, In-Line Maintainable valve with low maintenance requirements. The valve body is a rigid single piece casting or forging. The blow out proof valve stems are internally assembled and retained in the body. The separate plugs are retained in the body by a bolted or threaded cover. The design incorporates provision for external adjustment of the individual stem packings. The individual plug position in the valve seats allows for valve sealant to be injected onto the valve seats, which are the tapered contact surfaces of the body and plugs.

Super-LoMu Treatment

All Carbon Steel taper plug valves, have plugs with Super LoMu treatment. In this unique process, low friction PTFE is incorporated in the surface structure of the valve plug metal. This gives easier operation and enhanced resistance to taper lock over thousands of operations or many years of service.

Sealant Type

All valves described in this data book are filled with 733 sealant.


If you require a sealant different from normal, please state this at the time of ordering so that the valve can be assembled with the correct sealant.

In those cases where no previous experience exists regarding the suitability of the normal sealant for the line fluid on which the valve is to be used, please provide full service details so that we may ensure that the correct type of sealant is used in the assembly of the valve.



Figure Numbering

The opposite illustrates a typical figure number, if a fuller explanation is required please request Standards Sheet 0028-4001.

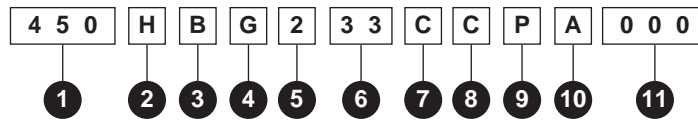

Key

- | | | |
|---|---|---|
| <p>1 Size
eg. 450 mm OR 18"</p> <p>2 Valve Type
eg. Super H</p> <p>3 D.I.P.V Double Isolation
(Twin Plug)</p> <p>4 Operation
G - Geared
N - Bare Stem
W - Wrench</p> <p>5 Pressure Rating
2 - ASME 150
3 - ASME 300
6 - ASME 600
9 - ASME 900
A - ASME 1500
B - ASME 2500
C - API 2000
D - API 3000
E - API 5000</p> | <p>6 End Connections
2 - Screwed BSP Taper
3 - Flanged RF
4 - Screwed API 5L
5 - Flanged RTJ
6 - Butt Weld End
9 - Socket Weld End</p> <p>7 Body Material
C - Steel WCB
B - Alloy Steel (API6A)
M - LCC/LF2</p> <p>8 Plug Material
C - Case Hardened Carbon Steel
J - Electroless Nickel Coated
Carbon Steel (0.003" for NACE)
M - Electroless Nickel Coated
Manganese Steel (LCC)
T - 17-4 PH Stainless Steel</p> | <p>9 Options
V - NACE MR0175 'Wetted Parts'
and Cover Bolts
P - NACE MR0175 'Wetted Parts'
S - Special Customer requirements</p> <p>10 Sealant Grade
A - 733
B - 733LT
C - 733X
D - 731
S - Special</p> <p>11 Supplementary Variations</p> |
|---|---|---|




Standards

The requirements for steel valves for refinery use are defined in API 599, BS 5353 is based on API 599 and plug valves to these two standards are interchangeable in all respects if the appropriate pattern is selected and steel plugs are used. Steel pipeline valves are covered by API 6D for which there is no direct British equivalent. However BS 5353 is a more stringent specification, so that valves complying with it will also meet API 6D. API 6D permits iron plugs: BS 5353 permits iron plugs only by agreement between purchaser and supplier. Therefore, it is British practice to manufacture the valves to BS 5353 except for the substitution of iron plugs. Double Isolation Plug Valves meet the requirements of BS 5353, API 599, API 6D and ANSI B16.34. Valves made in materials to meet API 6A are also available.

BS 2080	Face-to-face, centre-to-face, end-to-end, and centre-to-end dimensions of flanged and butt welding end steel valves for the petroleum, petrochemical and allied industries.
BS 6755 Pt 1	Testing of valves. Part 1 Specification for production pressure testing requirements.
BS 6755 Pt 2	Testing of valves. Part 2 Specification for fire type-testing requirements.
BS 5353	Specification for steel plug valves.
ANSI B16.10	Face-to-face and end-to-end dimensions of ferrous valves.
ANSI B16.34	Valves - flanged and butt welding end.
API 6A	Specification for wellhead equipment.
API 6D	Specification for pipeline valves.
API 599	Steel plug valves flanged or butt welding ends.
API 6FA	Fire test for valves.
NACE MR0175	Sulphide stress cracking resistant metallic material for oil field equipment.
ISO 9001	Quality Assurance approval standard.

DIPV Design Features

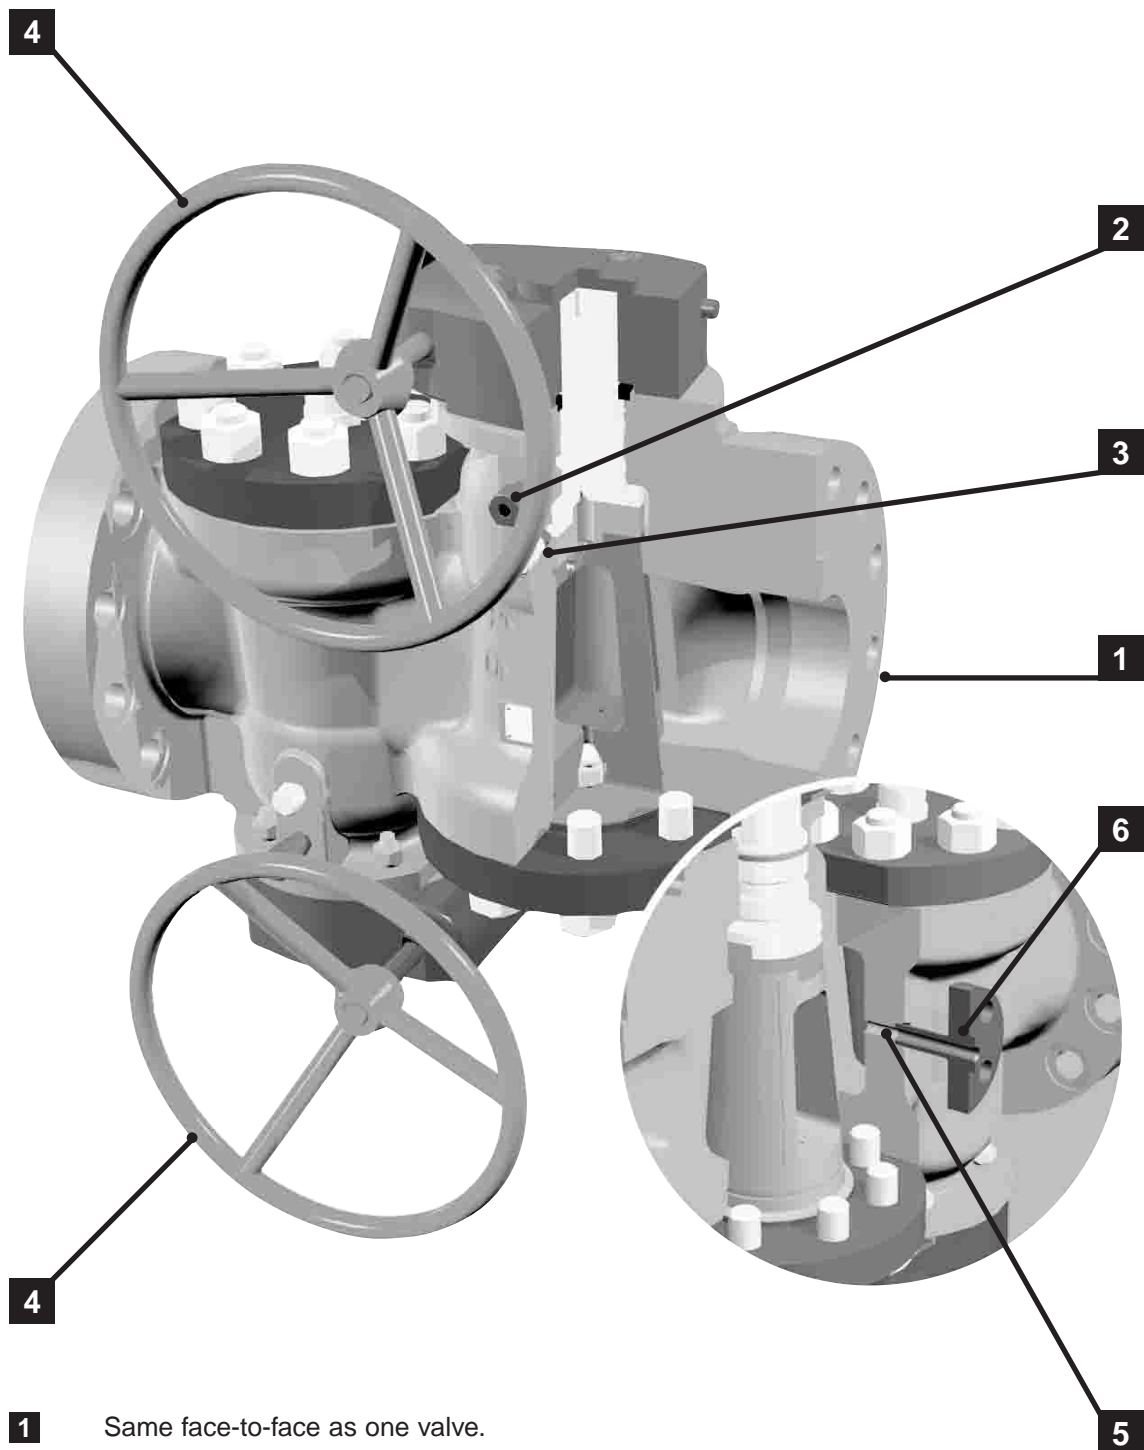

- 1** Same face-to-face as one valve.
- 2** In-line emergency stem sealing.
- 3** In-line sealant injection point.
- 4** Choice of mounting positions for actuators and handwheels.
- 5** Bleed port.
- 6** Bleed valve flange interface.




Design Features

2" - 4" ASME Class 150 - 1500

Main Features

(Components are shown for one plug assembly only.
The adjacent plug components are identical.)

- 1 Blow Out Proof Stem: Super LoMu treated, double 'D' drive for wrench.
- 2 Weather Seal.
- 3 Equaliser Ring: for low torque and bubble tight sealing.
- 4 Plug: Metal-to-metal seating, Super LoMu treated.
- 5 Pressure Balance Ball Valve.
- 6 Bleed Port: integral with body.
- 7 Bearing Pad.
- 8 Spiral Wound Sealing Gasket.
- 9 Diaphragm: stainless steel.
- 10 Thrust Pad.
- 11 Threaded Cover.
- 12 Cover-to-Body Sealant Injector.
- 13 Plug Loading Screw.
- 14 Protective Cap.
- 15 Stem Packing Compound Injector: renews sealing to atmosphere.
- 16 Graphite 'Fire Safe' Stem Seal.
- 17 Seat Sealant Injector: renews sealing to downstream.

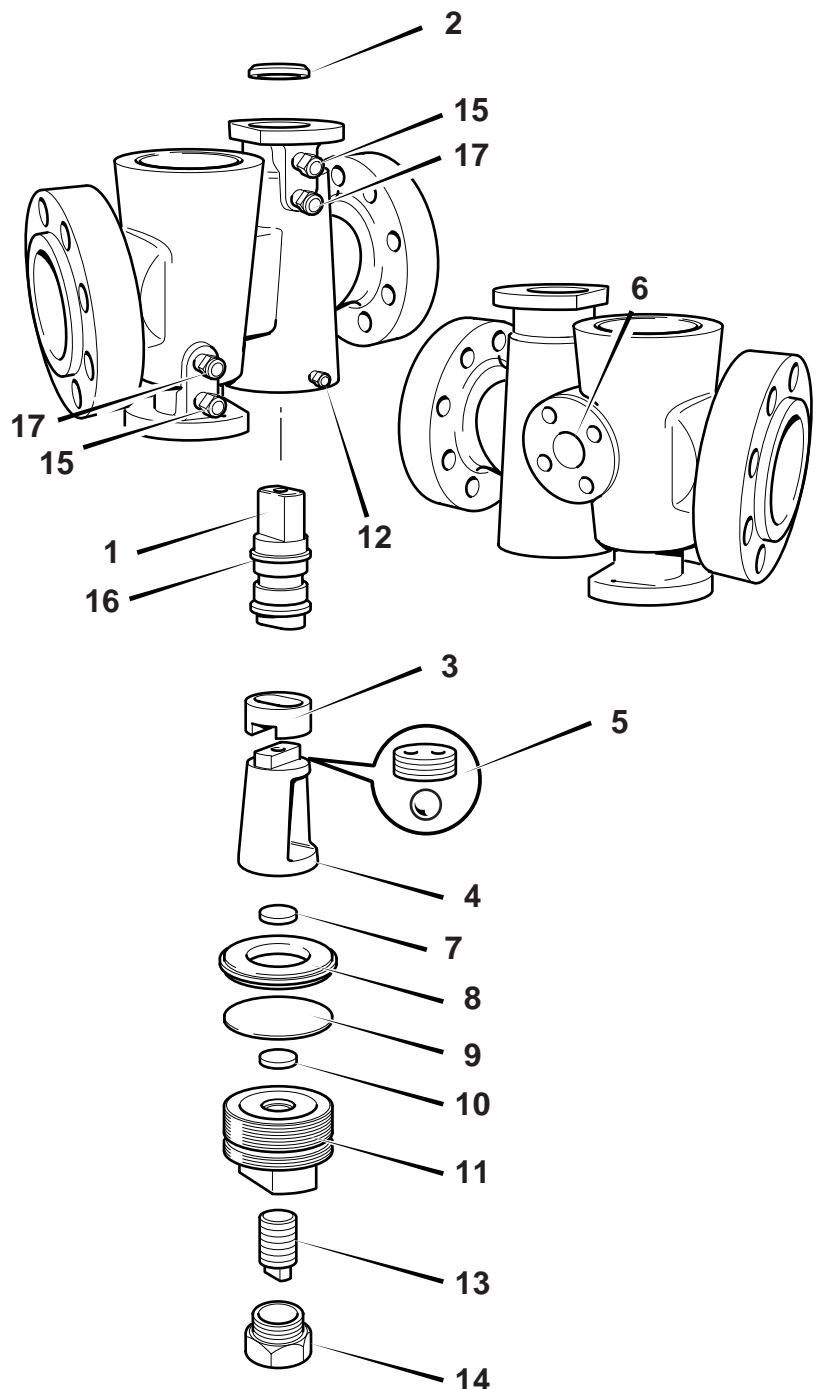

Design Features




2" - 4" ASME Class 2500

Main Features

(Components are shown for one plug assembly only. The adjacent plug components are identical.)

- 1 Blow Out Proof Stem: Super LoMu treated, double 'D' drive for wrench.
- 2 Weather Seal.
- 3 Thrust Bearing.
- 4 Gland Follower.
- 5 Anti-extrusion Ring.
- 6 Graphite 'Fire Safe' Stem Packing.
- 7 Equaliser Ring: for low torque and bubble tight sealing.
- 8 Pressure Balance Ball Valve.
- 9 Plug: Metal-to-metal seating, Super LoMu treated.
- 10 Bleed Port: integral with body.
- 11 Bearing Pad.
- 12 'C' Seal.
- 13 Threaded Cover.
- 14 Cover-to-Body Sealant Injector.
- 15 Plug Loading Screw.
- 16 Protective Cap.
- 17 Stem Packing Compound Injector: renews sealing to atmosphere.
- 18 Seat Sealant Injector: renews sealing to downstream.
- 19 Packing Compound Injector.

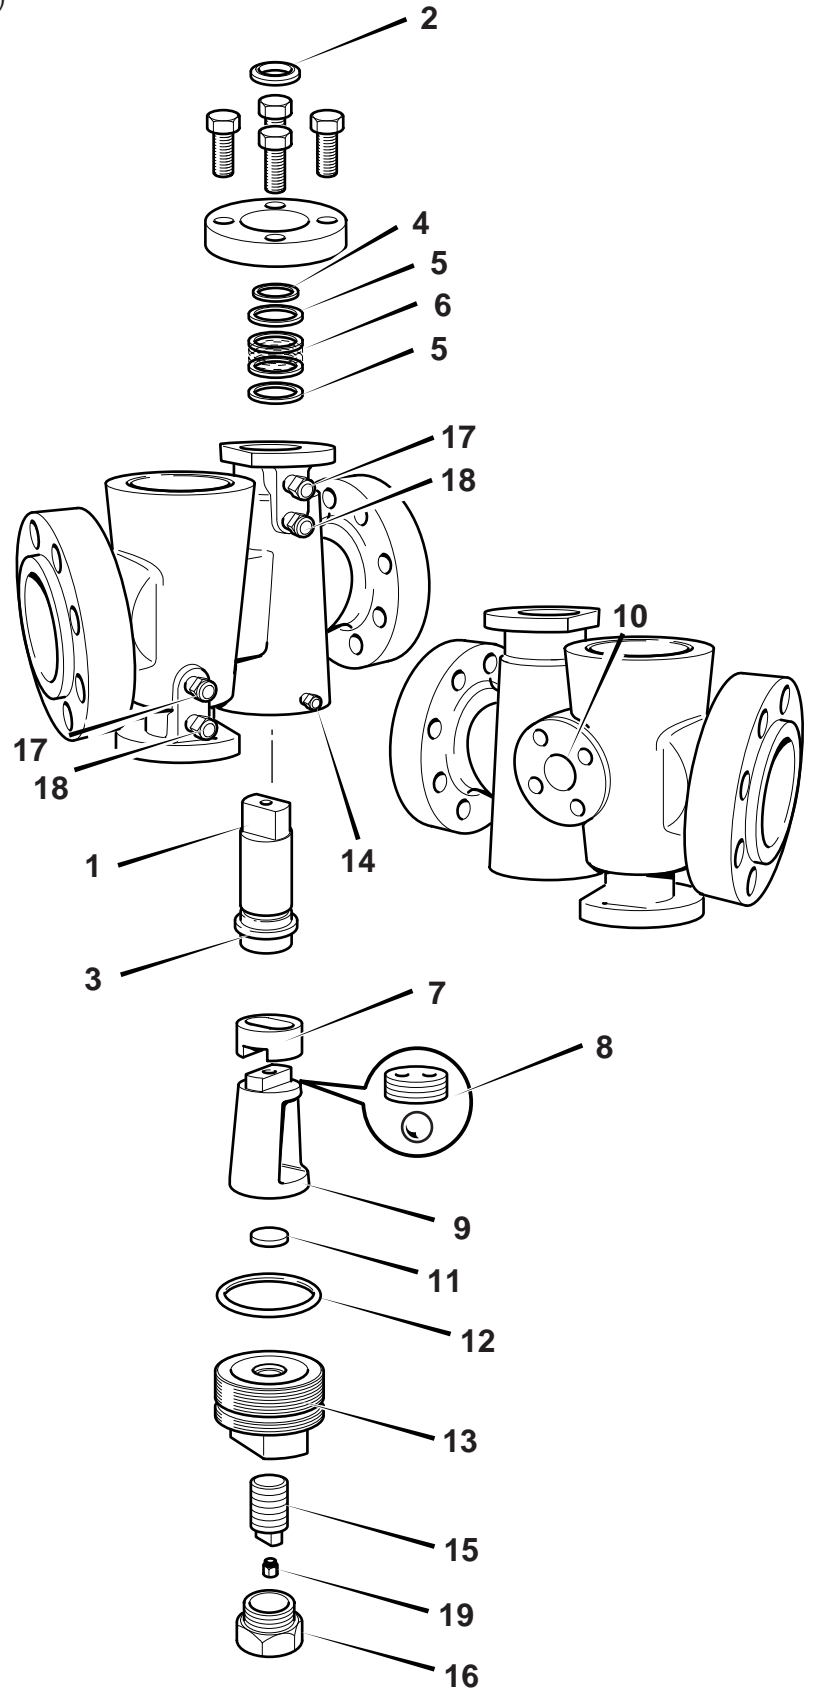




Design Features

4" - 24" ASME Class 150 - 1500

Main Features

(Components are shown for one plug assembly only.
The adjacent plug components are identical.)

- 1 Key Drive Blow Out Proof Stem:
Super LoMu treated.
- 2 Weather Seal.
- 3 Equaliser Ring: for low torque and
bubble tight sealing.
- 4 Slotted Plug: Metal-to-metal seating,
Super LoMu treated.
- 5 Pressure Balance Ball Valve.
- 6 Bleed Port: integral with body.
- 7 Bearing Pad.
- 8 Diaphragm: stainless steel.
- 9 Thrust Pad.
- 10 Bolted Cover.
- 11 Plug Loading Screw.
- 12 Protective Cap.
- 13 Stem Packing Compound Injector:
renews sealing to atmosphere.
- 14 Graphite 'Fire Safe' Stem Seal.
- 15 Seat Sealant Injector: renews sealing
to downstream.
- 16 Spiral Wound Gasket (if fitted).

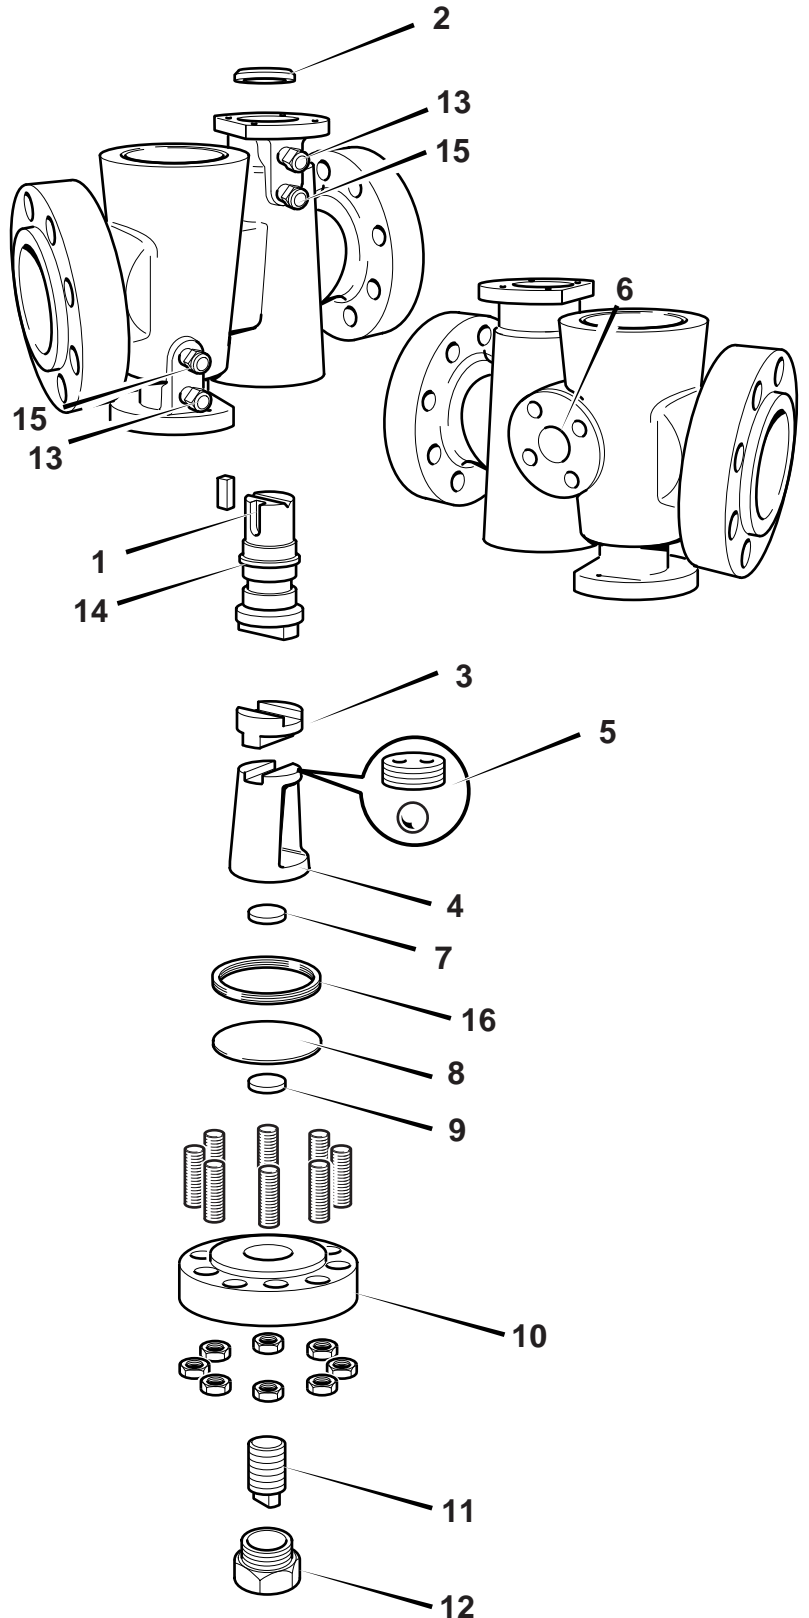

Design Features




4" - 24" ASME Class 2500

Main Features

(Components are shown for one plug assembly only.
The adjacent plug components are identical.)

- 1 Key Drive Blow Out Proof Stem:
Super LoMu treated.
- 2 Weather Seal.
- 3 Equaliser Ring: for low torque and
bubble tight sealing.
- 4 Slotted Plug: Metal-to-metal seating,
Super LoMu treated.
- 5 Pressure Balance Ball Valve.
- 6 Bleed Port: integral with body.
- 7 Bearing Pad.
- 8 Diaphragm: stainless steel.
- 9 Thrust Pad.
- 10 Bolted Cover.
- 11 Plug Loading Screw.
- 12 Protective Cap.
- 13 Stem Packing Compound Injector:
renews sealing to atmosphere.
- 14 Graphite 'Fire Safe' Stem Seal.
- 15 Seat Sealant Injector: renews sealing
to downstream.
- 16 Spiral Wound Gasket (if fitted).

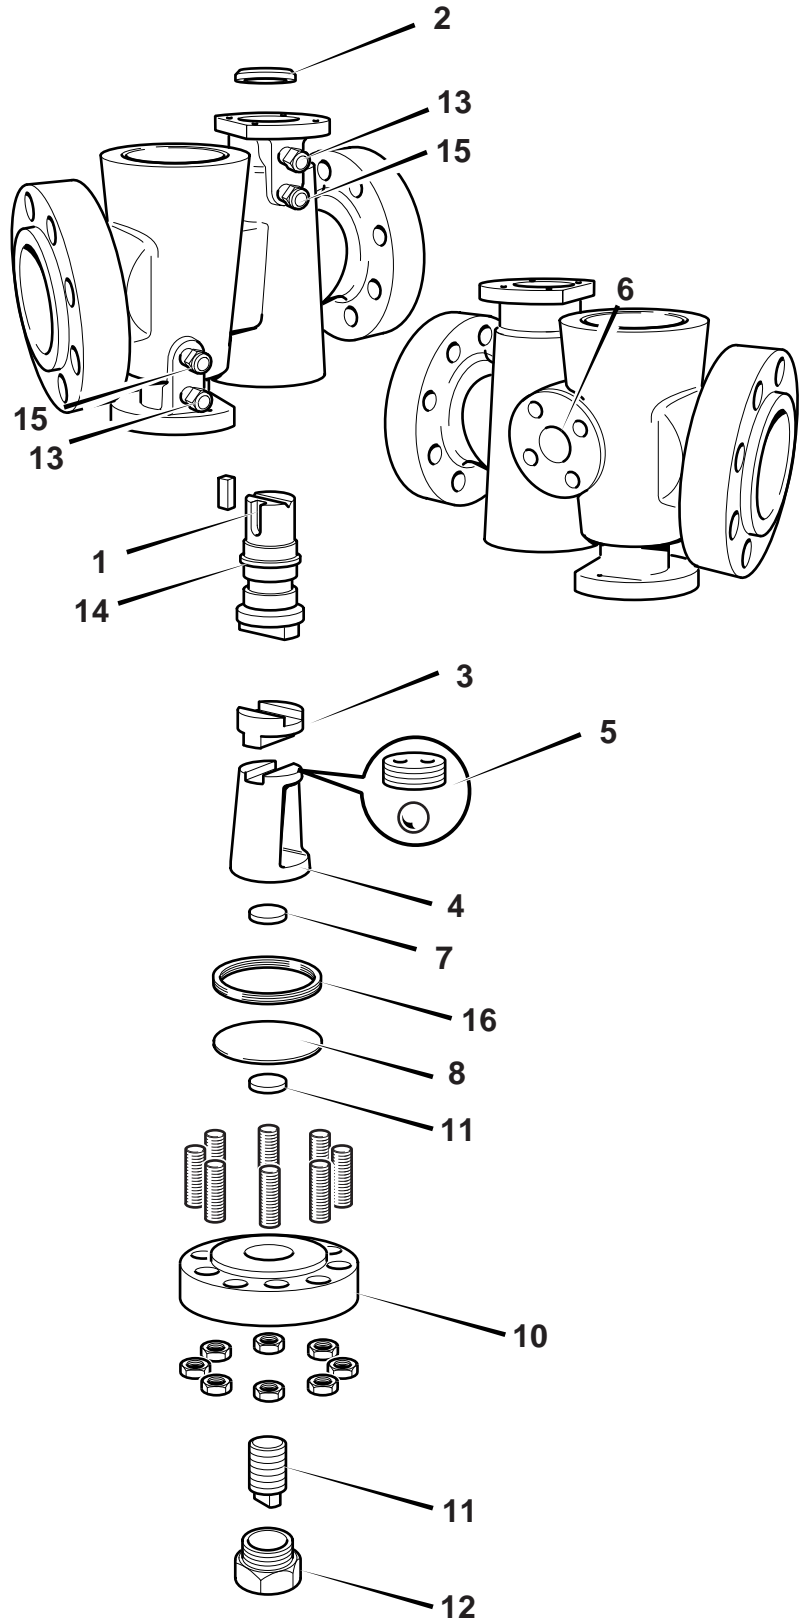



Pressure Testing

Test Pressures

VALVE RATING	Maximum C.W.P.		BODY TEST (minimum)		SEAT TEST (minimum)	
	bar	lbf/in ²	bar	lbf/in ²	bar	lbf/in ²
CLASS 150 PN 20	19.5	285	29.5	427.5	21.5	313.4
CLASS 300 PN 50	51	740	76.5	1110	56	814
CLASS 600 PN 100	102	1480	153.2	2220	112	1628
CLASS 800	138	2000	207	3000	152	2200
CLASS 900 PN 150	153	2220	230	3330	168	2442
CLASS 1500 PN 250	256	3705	383	5558	281	4076
CLASS 2500 PN 420	425	6170	638	9255	468	6787
API 2000	138	2000	276	4000	138	2000
API 3000	207	3000	414	6000	207	3000
API 5000	345	5000	690	10000	345	5000

Class 800 pressures are taken from BS 5353, API pressures are taken from API 6A, all other pressures are taken from ANSI 16.34. The test pressures from ANSI 16.34 are those relevant to Carbon Steel ASTM A 216 Gr WCB.

There may not be exact equivalence between pressure in bar and in lbf/in² due to rounding (1 bar = 105 Pa).

Each relevant standard defines the minimum length of time for which each test pressure is to be maintained and also the testing operations sequence.

Duration of hydrostatic tests in minutes (minimum)					
VALVE SIZE		BS 6755 Pt 1		API 6D	
		SHELL TEST	SEAT TEST	SHELL TEST	SEAT TEST*
40 mm	≤ 1½"	¼	¼	not applicable	
50 mm	2"	¼	¼	2	2
65-100 mm	2½-4"	1	½	2	2
150 mm and 200 mm	6" and 8"	1	½	5	5
250 mm	10"	3	1	5	5
300 mm and 450 mm	12-18"	3	1	15	5
500 mm	≤ 20"	3	2	30	5


* These durations will be adhered to unless a different specification is required against a particular order.

Hydrostatic tests of long duration require that the valve be given special attention to facilitate pipeline testing. Plug sealant should be injected before the start of the test, after the test has finished and at any time during the test that there is a sign of leakage.

DIPV - Class 150



Dimensions in these tables are for standard trim valves.
Refer to Serck Audco Valves for valves for low temperature and with ENP plugs.

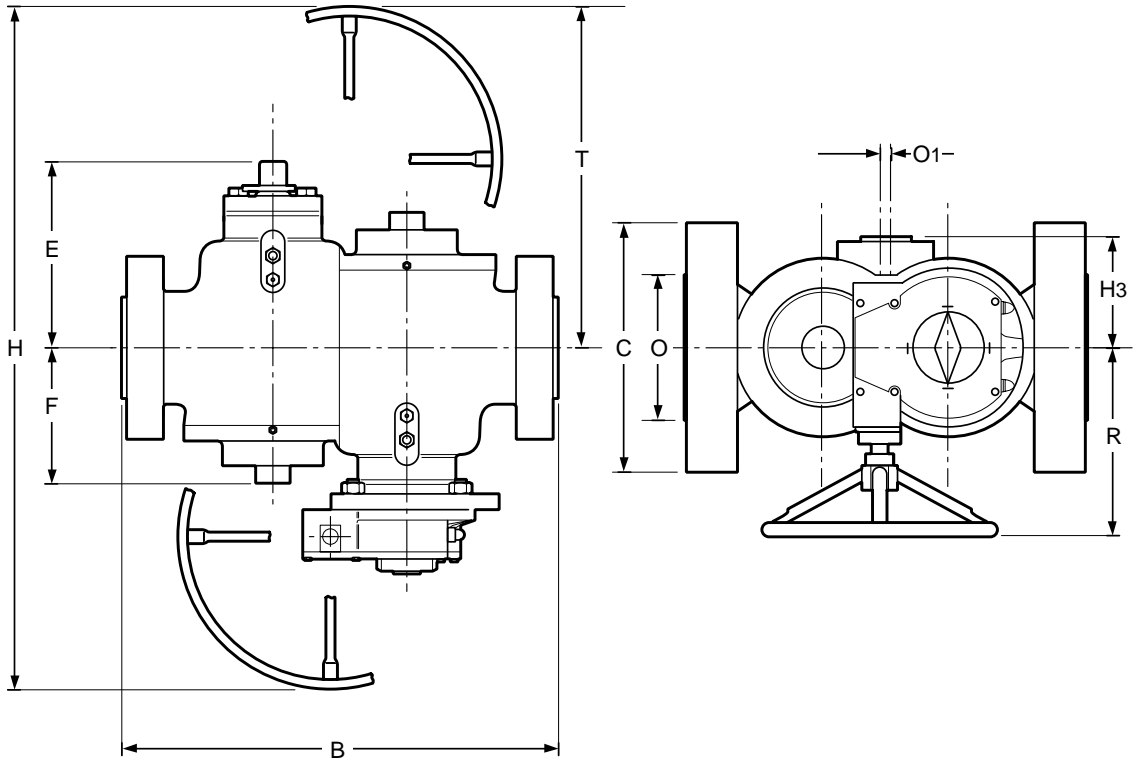


			50	80	100	150	200	250	300	350	400	450	500	600
B	Face-to-face RF	mm	292	381	432	610	660	787	838	889	991	1092	1194	1397
C	Flange Diameter	mm	165	210	273	381	419	508	559	603	686	743	813	940
E	CL to top of Stem	mm	194	239	255	315	424	483	483	530	491	659	-	690
F	CL to bottom of Body Cap	mm	113	180	190	200	290	320	370	414	400	446	-	485
H	Height	mm	500	716	870	960	1220	1350	1250	1600	1700	1800	1900	2200
O	RF Diameter	mm	92	127	157	216	270	324	381	413	470	534	584	692
T	CL to top of Handwheel	mm	250	358	435	480	610	675	625	800	850	900	950	1100
R	CL to face of Handwheel	mm	162	207	230	250	280	280	390	370	500	500	550	600
O₁	Bleed Size	mm	13	13	13	19	19	25	25	25	25	25	25	25
H₃	CL to end of Bleed Flange Face	mm	104	116	130	131	244	273	276	337	-	283	-	-
	Operating Torque	Nm	17	42	129	600	950	1355	1900	1780	2500	7600	-	3500
	Weight	kg	45	105	190	380	472	725	930	1115	1425	1955	2540	3265



DIPV - Class 300

Dimensions in these tables are for standard trim valves.
Refer to Serck Audco Valves for valves for low temperature and with ENP plugs.

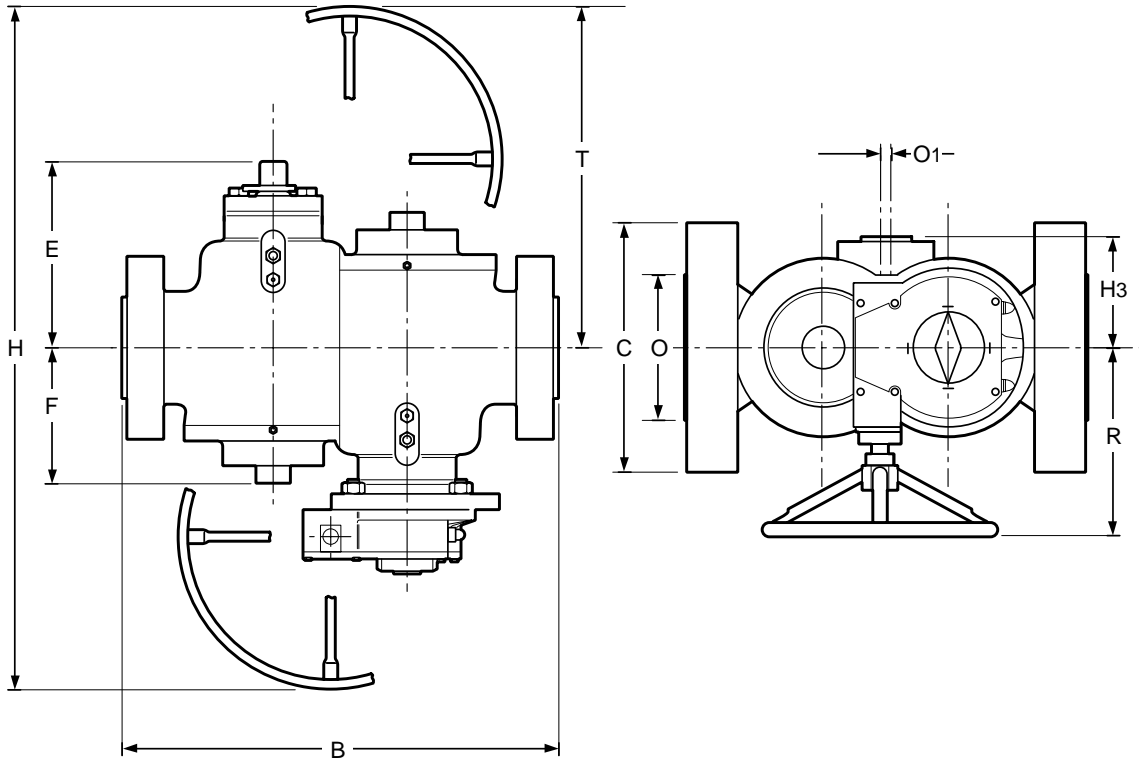


			50	80	100	150	200	250	300	350	400	450	500	600
B	Face-to-face RF	mm	292	381	432	610	660	787	838	889	991	1092	1194	1397
C	Flange Diameter	mm	165	210	273	381	419	508	559	603	686	743	813	940
E	CL to top of Stem	mm	194	239	255	315	424	483	483	530	491	659	-	690
F	CL to bottom of Body Cap	mm	113	180	190	205	290	320	375	414	400	446	-	485
H	Height	mm	500	716	870	960	1370	1490	1250	1340	1380	1600	1900	2200
O	RF Diameter	mm	92	127	157	216	270	324	381	413	470	534	584	692
T	CL to top of Handwheel	mm	250	358	435	480	685	745	625	670	690	800	950	1100
R	CL to face of Handwheel	mm	162	207	230	250	365	365	445	445	445	500	550	600
O₁	Bleed Size	mm	13	13	13	19	19	25	25	25	25	25	25	25
H₃	CL to end of Bleed Flange Face	mm	90	95	105	137	185	273	276	-	-	283	-	300
	Operating Torque	Nm	43	108	339	850	1225	1900	2200	2930	3200	5100	-	6400
	Weight	kg	48	110	200	400	495	760	975	1170	1495	2055	2670	3430

DIPV - Class 600



Dimensions in these tables are for standard trim valves.
Refer to Serck Audco Valves for valves for low temperature and with ENP plugs.

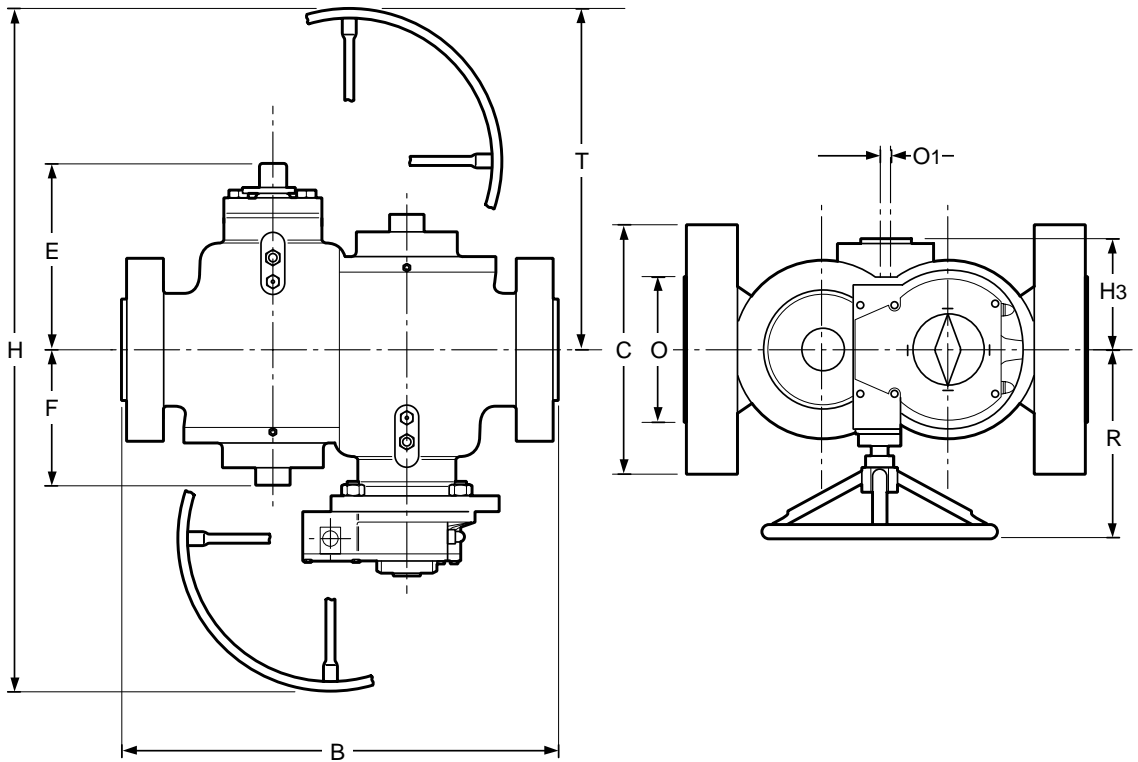


			50	80	100	150	200	250	300	350	400	450	500	600
B	Face-to-face RF	mm	292	381	432	610	660	787	838	889	991	1092	1194	1397
C	Flange Diameter	mm	165	210	273	381	419	508	559	603	686	743	813	940
E	CL to top of Stem	mm	194	239	255	315	424	483	483	530	491	659	-	690
F	CL to bottom of Body Cap	mm	113	180	190	210	290	332	375	414	410	446	-	485
H	Height	mm	500	716	870	960	1370	1490	1250	1340	1380	1600	1900	2200
O	RF Diameter	mm	92	127	157	216	270	324	381	413	470	534	584	692
T	CL to top of Handwheel	mm	250	358	435	480	685	745	625	670	690	800	950	1100
R	CL to face of Handwheel	mm	162	207	230	250	365	365	445	445	445	500	550	600
O₁	Bleed Size	mm	13	13	13	19	19	25	25	25	25	25	25	25
H₃	CL to end of Bleed Flange Face	mm	90	95	105	130	185	273	276	229	245	-	-	290
	Operating Torque	Nm	87	217	678	1100	2000	2575	4000	2930	4500	8900	-	12200
	Weight	kg	50	116	210	420	620	800	1090	1260	1630	2160	2800	3600



DIPV - Class 900

Dimensions in these tables are for standard trim valves.
Refer to Serck Audco Valves for valves for low temperature and with ENP plugs.

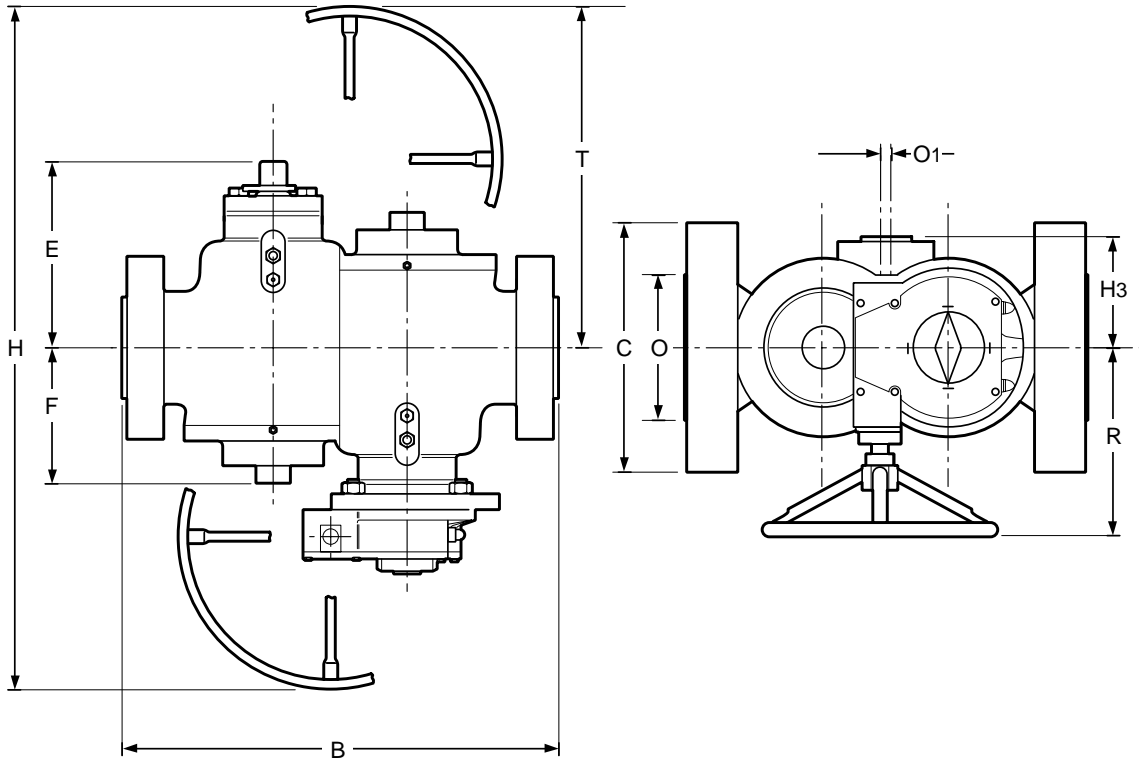


			50	80	100	150	200	250	300	350	400	450	500	600
B	Face-to-face RF	mm	368	381	457	610	737	838	965	1029	1130	1219	1321	1549
C	Flange Diameter	mm	216	241	292	381	470	546	610	641	705	787	857	1041
E	CL to top of Stem	mm	214	239	255	315	527	483	-	-	-	-	-	-
F	CL to bottom of Body Cap	mm	113	180	190	219	290	340	-	-	-	-	-	-
H	Height	mm	580	700	870	960	1400	1240	1400	1500	1650	1800	2000	2300
O	RF Diameter	mm	92	127	157	216	270	324	381	413	470	534	584	692
T	CL to top of Handwheel	mm	290	350	435	480	700	620	700	750	825	900	1000	1150
R	CL to face of Handwheel	mm	170	180	230	250	390	445	465	500	560	600	600	600
O₁	Bleed Size	mm	13	13	13	19	19	25	25	25	25	25	25	25
H₃	CL to end of Bleed Flange Face	mm	117	95	110	130	290	273	-	-	-	-	-	-
	Operating Torque	Nm	130	325	705	1500	2711	4470	4300	-	5200	-	-	-
	Weight	kg	96	130	250	530	800	1125	1680	1845	2355	3240	4200	5500

DIPV - Class 1500



Dimensions in these tables are for standard trim valves.
Refer to Serck Audco Valves for valves for low temperature and with ENP plugs.

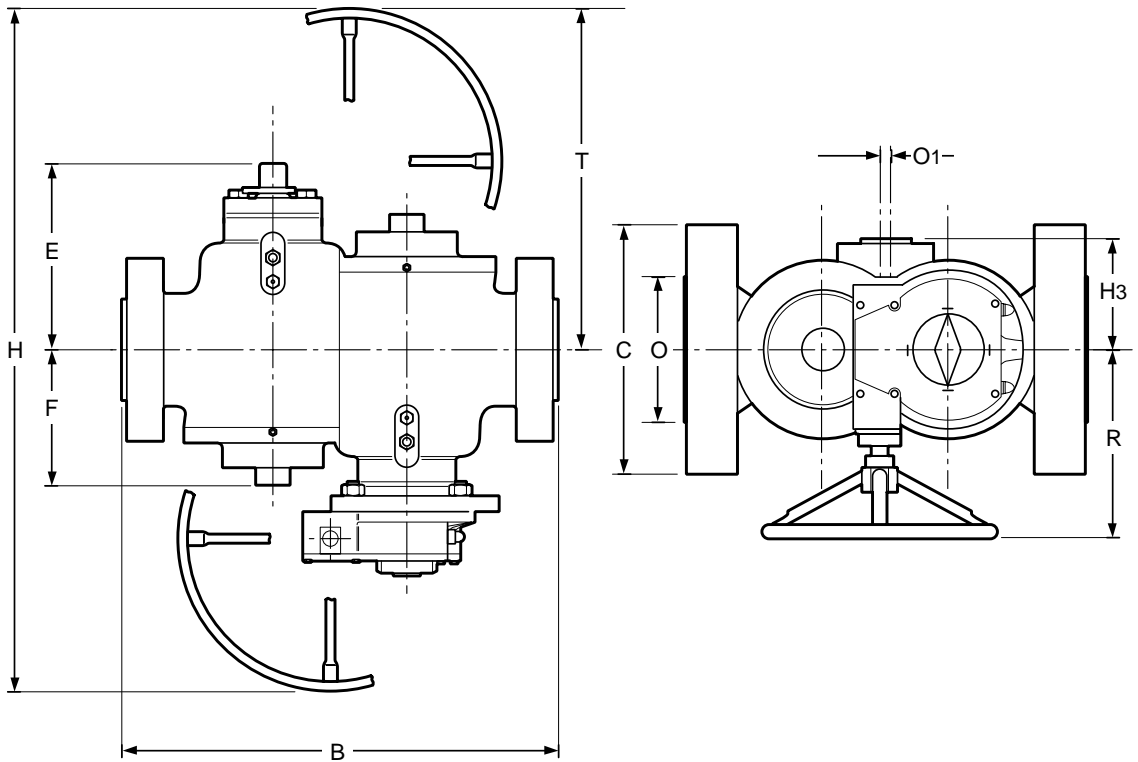


			50	80	100	150	200	250	300	350	400
B	Face-to-face RF	mm	368	470	546	705	832	991	1130	1257	1384
C	Flange Diameter	mm	216	267	311	394	483	584	673	749	825
E	CL to top of Stem	mm	214	239	255	336	527	500	-	-	-
F	CL to bottom of Body Cap	mm	113	180	190	227	290	360	-	-	-
H	Height	mm	580	700	870	1060	1160	1240	1400	1650	2000
O	RF Diameter	mm	92	127	157	216	270	324	381	413	470
T	CL to top of Handwheel	mm	290	350	435	530	580	620	700	825	1000
R	CL to face of Handwheel	mm	170	180	230	330	445	445	465	600	600
O₁	Bleed Size	mm	13	13	13	19	19	25	25	25	25
H₃	CL to end of Bleed Flange Face	mm	117	134	110	130	185	300	-	-	-
	Operating Torque	Nm	217	542	745	3000	4900	6800	6000	-	6900
	Weight	kg	136	240	320	520	975	1460	2340	3200	4500



DIPV - Class 2500

Dimensions in these tables are for standard trim valves.
Refer to Serck Audco Valves for valves for low temperature and with ENP plugs.

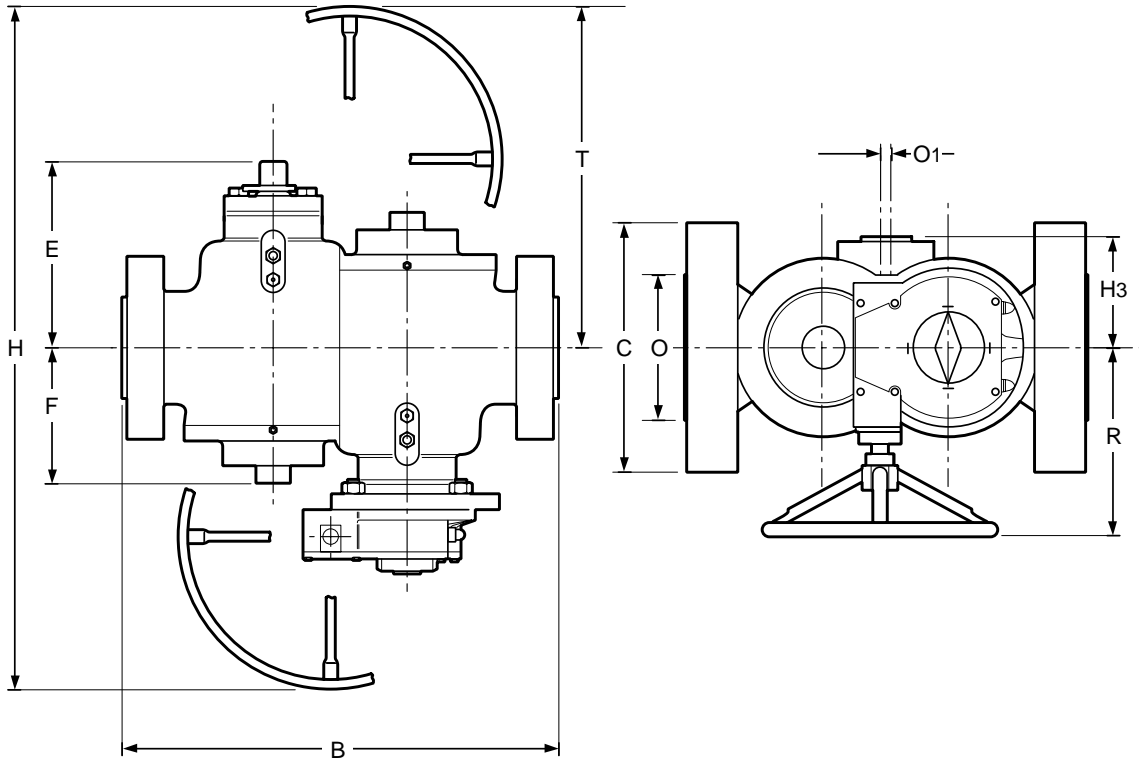

			50	80	100	150	200	250	300
B	Face-to-face RF	mm	451	578	673	914	1022	1270	1422
C	Flange Diameter	mm	235	305	356	483	552	673	762
E	CL to top of Stem	mm	214	313	380	376	545	-	562
F	CL to bottom of Body Cap	mm	163	230	250	274	-	-	461
H	Height	mm	680	1160	1260	1370	1250	1350	1600
O	RF Diameter	mm	92	127	157	216	270	324	381
T	CL to top of Handwheel	mm	340	580	630	685	625	675	800
R	CL to face of Handwheel	mm	207	273	391	465	445	580	580
O₁	Bleed Size	mm	13	13	13	19	19	25	25
H₃	CL to end of Bleed Flange Face	mm	130	187	180	172	290	-	393
	Operating Torque	Nm	362	1500	1247	6600	8900	-	9000
	Weight	kg	148	300	460	1000	1675	1800	3740

Body Materials

	SAV Specification	Used for	Comparable Specifications	Form
CARBON STEEL	ASTM A216 Gr. WCB & WCC, Max. C 0.25%, Max. hardness Rc. 22	Bodies all types	BS 1504-161 Grade 480	CASTING

Alternative materials available include:

ASTM A216 Gr. WCB and BG/GBE/C9 (British Gas Corporation specification - casting)

ASTM A352 Gr. LCB (carbon steel low temperature - casting)

ASTM A352 Gr. LCC maximum carbon content 0.23% (carbon manganese steel low temperature - casting)

ASTM A350 Gr. LF2 (carbon manganese steel low temperature - forging)

API 6A used for bodies to API 6A

ASTM A217 Gr. WC1/WC6 (carbon/alloy steel - casting)

ASTM A351 Gr. CF8M/CF8/CF3M (stainless steel - casting)

Duplex stainless steels

For other material options please contact Serck Audco Valves.

Plug Materials

	SAV Specification	Used for	Comparable Specifications	Form
CARBON STEEL	ASTM A105 or ASTM A216 Gr. WCB	Case Hardened/NACE all sizes electroless nickel 0.003"	BS 1503-164-490 BS 1504-161 Grade 480	FORGING/ CASTING
	BS 970 Gr. 070 M20	Bodies all types	BS 1504-161 Grade 480	WROUGHT BAR

Alternative materials available include:

ASTM A352 Gr. LCB (carbon steel low temperature)

ASTM A352 Gr. LCC maximum carbon content 0.23% (carbon manganese steel low temperature)

ASTM A350 Gr. LF2 (carbon manganese steel low temperature)

ASTM A351 Gr. CF8M (18/10/2 austenitic stainless steel)

ASTM A747 Gr. CB7 CU1 (17-4 PH stainless steel)

ASTM A705 Type 630 (17-4 PH stainless steel)

ASTM A564 Type 630 (17-4 PH stainless steel)

Duplex stainless steels

For other material options please contact Serck Audco Valves.

Stem Materials

	SAV Specification	Used for	Comparable Specifications
ALLOY STEEL	BS 970 Gr. 709M40 (1% Cr. 1/2% Mo) Max. Hardness Rc. 22	All classes	AISI 4140
STAINLESS STEEL	ASTM A705/564 Type 630 17-4 PH	Corrosive services or low temperatures	-

Alternative material available:

BS 3076 NA18 (K500 Monel) - Nickel Copper Aluminium Alloy

For other material options please contact Serck Audco Valves.



Materials

Cover Materials

	SAV Specification	Used for	Comparable Specifications	Form
CARBON STEEL	ASTM A105	2" - 4"	BS 1503-164-490	FORGING
	ASTM A516 Gr. 70 Max. Hardness Rc. 22	6" and above All Classes	BS 1501-151 Grade 430	PLATE
ALLOY STEEL	BS 970 Gr. 709 M40	Some large valves	AISI 4140	FORGING

Alternative materials available:

ASTM 516 Gr. 70 Charpy Tested

BS 1501 Gr. 316 S11/13 (stainless steel) - Comparable to ASTM A240 Gr. 316

Duplex stainless steels

For other material options please contact Serck Audco Valves.

Bolting Materials

	SAV Specification	Used for	Nace Specifications
ALLOY STEEL STUDS	ASTM A193 Gr. B7	All Classes	ASTM A193 Gr. B7M
CARBON STEEL NUTS	ASTM A194 Gr. 2H	All Classes	ASTM A194 Gr. 2HM

Alternative materials available:

ASTM A193 Gr. B7M

ASTM A194 Gr. 2HM

ASTM A320 Gr. L7M

ASTM A320 Gr. L7 (low temperature) - STUDS

ASTM A194 Gr. L4 (L7/S4 supplement, low temperature) - NUTS

BS 3076 NA18 (K Monel) - Nickel Copper Aluminium Alloy - STUDS

BS 3076 NA13 (400 Monel) - Nickel Copper Alloy - NUTS

For other material options please contact Serck Audco Valves.

Audco sealants are formulated specially for use in Audco valves and no other types of sealant should be used, nor should Audco valve sealants be used for any purpose other than injecting into valves without our express recommendation.

Injection by Sealant Gun

All valves are fitted with a taper threaded sealant injector positioned in the centre of the stem or as a side feed in the body.

Sealant Guns

Sealant guns are fitted with flexible hoses giving a hook-on connection to the combination sealant injector on the valve.



Type CL 400-D

Hand operated hydraulic gun, fitted with a pressure gauge. This gun is designed to take Size 'K' sealant sticks. Effortless to operate and gives positive indication of when valve has been fully charged. Further information available on request.



Type ALG 4

This gun is designed to take pre-packed cartridges of soft grade sealant which screw into the body of the gun and which can be removed either when empty or when a change of sealant is necessary.

Hypregun

Easy to use pneumatically operated sealant injection gun. Uses bulk lubricant in 5 quart cans. Recommended for large valve installations such as manifolds, gas processing plants, compressor stations, refineries and water treatment plants.

Pneumatic Sealant Injection Equipment

For compressed air actuated valves a pneumatic dispenser can be supplied.

It has a 3lbs capacity sealant reservoir and a pumping element suitable for use on valves operating at line pressures up to 5000 lb/in². A predetermined quantity of sealant is fed into the valve at each operation. Further information available on request.



Sealants (multi-purpose and specialised)

Multi-Purpose Sealants

In recent years the Serck Audco Valves research laboratories have paid great attention to the development of multi-purpose sealants to simplify plant maintenance where many services are encountered. As a result of this research, we are able to offer two sealants which, between them, cover a very wide variety of services and have replaced many of the older Audco sealants. A single multi-purpose sealant can often be used throughout an entire plant, even though that plant handles a variety of fluids. This simplifies maintenance and reduces the number of sealants which need to be stocked.

Lubricating and Sealing Properties

In addition to being suitable for a wide range of services, these sealants have excellent lubricating properties and great film strength. They supplement Super LoMu treatment to reduce friction between the seating surfaces and provide a very effective seal at higher line pressures.

Suitability Tests

The table below summarises our general sealant recommendations. Further details for specific services are contained in the Chemical Resistance Section of our catalogue.

Where there is any doubt to the suitability of a particular sealant for a given service, tests should be carried out in a new clean valve. Experience shows that this is the only satisfactory way to conduct such tests. Laboratory tests carried out by immersing a stick of sealant in a breaker of the line fluid have proved most misleading. Where samples of fluids can be supplied, together with details of temperatures and pressure rating involved, we can carry out tests in our own laboratories and give recommendations based upon the results.

Temperature Range

The temperature range of each sealant is given in these tables but the sealant performance within the given temperature range may vary with the particular fluid being handled.

Multi-Purpose Sealants

Sealant	Form	Colour	Temperature Range*		Recommended for	Do not use on
			Min.	Max.		
731	Sticks (all sizes) Cartridges Bulk	Cream	-15°C -20°C -25°C	230°C 230°C 230°C	Most chemical plant services, water, aqueous solutions, dilute acids, all alkaline solutions, compressed air, tars, bitumens.	Strong acid solutions, petroleum products.
733	Sticks (all sizes) Cartridges Bulk	Cream	0°C -10°C -15°C	250°C 250°C 250°C	Most hydrocarbons, butane, propane, gasoline, kerosene, oils, fuel oils. Natural gas, manufactured gas (including gas with carbon dioxide, hydrogen sulphide, water and condensate), LPG, glycols.	Strong alkalis, high aromatic solvents.

* Temperature range is dependent upon nature of service.

Sealants (multi-purpose and specialised)



Specialised Sealants

Sealant	Form	Colour	Temp Range °C (°F)		Recommended for	Do not use on
			Min	Max		
201	H & K Sticks Cartridges Bulk	White	-7 (-20)	200 (390)	Domestic water services, foodstuffs and pharmaceuticals.	As 731.
147	H & K Sticks Cartridges Bulk	White	-10 (14)	70 (160)	Nitrating acids, sulphuric acid and other oxidising elements.	Hydrocarbon chlorinated and aromatic solvents.
563	H & K Sticks Cartridges Bulk	Yellow	-10 (14)	150 (300)	Chlorinated and aromatic hydrocarbon solvents.	Strong acids, nitrating acids, water and water based services and alcohols.
734	H & K Sticks Cartridges Bulk	Cream	0 (32)	170 (340)	Water, high pressure, hot water and steam.	As 731.
735	H & K Sticks Hard grade Bulk only	Black	-40 (-40)	325 (620)	Hot gases and high temperature services 220°C maximum in the presence of oxygen.	Neat petroleum products. Strong mineral acids. Chlorinated and aromatic acids.
591	H & K Sticks Cartridges Bulk	Cream	0 (32)	300 (570)	Petroleum based heat transfer oils. Hot fuel oil to 120°C.	As 733.
608	H & K Sticks Cartridges Bulk	Off White	0 (32)	340 (650)	Hot hydrocarbon gases and vapours including high temperature cracking and reforming. Strong acids and alkalis to 150°C.	Aromatic and chlorinated solvents. Liquid hydrocarbons and nitrating acids.
574	Cartridges Soft grade Bulk only	Beige	-50 (-58)	50 (120)	Ammonia and brine.	As 731.
985	K Sticks Cartridges Soft grade Bulk only	Light Brown	-10 (12)	150 (300)	Sweet and sour natural and manufactured gas with water/organic condensates. Preferred at elevated temperatures.	As 733.
2977	K Sticks Cartridges Soft grade Bulk only	Black	-40 (-40)	325 (620)	As for 735, also oil and water mixtures where water content is above 50% in the mixture.	As 735.



Sealants (packaging, storage and handling)

Packaging of Stick Sealants

Sealant is supplied in sticks of suitable diameter and length, packed either singly or in boxes, as given in the following table. Weights will vary from those shown over a range of approximately 20 - 30% according to grade sealant.

Stick Sizes	H	K
Stick diameter (mm)	35	35
Stick length (mm)	150	240
Number of sticks in box	1*	1*
Weight of box (gms)	Single - 170 Box of 12 - 2270	Single - 230 Box of 12 - 2760

*Note: Size 'H' and 'K' sticks are packed singly in cylindrical containers or in boxes of 12.

Gun Sealants

Type ALG4 - Pre-packed cartridge of soft grade sealant.

Type 400-D - 'K' Stick.

Type ALG 3 - 'H' Stick

Sealant can be purchased in bulk in larger containers. Bulk supplies available are:

Type of Container	Can	Can	Pail	Drum	Drum
Net Weight	3 kg	5 kg	18 kg	80 kg	180 kg

Packaging of Soft Grade Sealants

Soft grade sealants cannot be formed into sticks for screw application.

Most sealants are available in cartridges for direct insertion into Sealant Gun Type ALG4.

Bulk supplies of soft grade sealants are available in the same size containers as given in the table at the top of this page for bulk stick grade sealants. When soft grade sealants are required they should be ordered as such, e.g. 731 Soft Grade.

Audco Stem Packing Compound

This is a material prepared in stick form for packing the stems of Type 'H' and Super 'H' valves. Stem packing must under no circumstances be used in the valve sealant system. Also, valve sealants are not suitable for sealing stems. Stem packing compound is supplied in cylindrical containers as follows:

Stick Size	A	B	D
Number of Sticks in Container	40	24	24

Storage and Handling of Sealants

Sealants should be stored in clean, dry conditions away from heat and flame and strong oxidising agents. Keep containers closed and store sealants in their original containers until required for use.

All of our sealants have flash points above 150°C but some will burn if subjected to sufficiently fierce flames. If any sealant is incinerated avoid breathing the fumes.

Normal hygiene procedures should be followed e.g. avoid prolonged skin contact, wash hands thoroughly after use, etc.

Specific data sheets for each sealant are available on request.

Serck Audco - setting the pace in valve technology

Serck Audco has a reputation for quality and reliability. This long established reputation is maintained by modern design and manufacturing techniques. Today, the company, a member of the Flowserve Flow Control group, is one of the world's leading manufacturers and suppliers of valves and valve technology.

Serck Audco products are supplied and serviced around the globe, in industries as diverse as oil and gas, food and chemical processing.

Other products available:

- Butterfly valves
- Taper plug valves
- PTFE sleeved plug valves
- Process ball valves
- Pipelines ball valves
- Actuators

Copies of relevant literature available on request.



FLOWERVE INDIA CONTROLS PVT LTD-MMN PLANT
B-8, MMDA Industrial Area, Maraimalai Nagar,
Kanchipuram Dist - 603209, Tamilnadu, India
Phone: +91 44 2745 2323 Fax: +91 44 2745 2327
Email : AudcoPlugindia@flowserve.com
AudcoSlimsealindia@flowserve.com

FLOWERVE[®]

Flow Control Division